

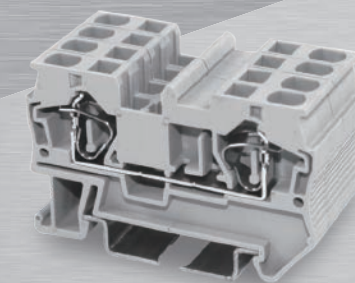


A-472411 | P



RAIL MOUNTING
TERMINAL BLOCK

E-mail: support@logic2c.com
<https://www.logic2c.com>



SINCE 1990

Professionally providing terminal connection solutions
















High quality is the guarantee of winning the market, while effective modern management and quality system is the premise to support high quality. In terms of product standards, especially UTL has studied IEC, UL, CSA, GB, CE, CCC with great concentration and other international and domestic standards for wiring terminals, and according to these standards, The company has compiled stricter corporate standards, from product development, mold design, procurement of raw materials, production of metal parts, plastic parts From the forming of parts, to the assembly of finished products, quality inspection, packaging and delivery, etc. Each link is checked by professional personnel according to the corresponding standards. To produce marketable products, used in the field of industrial automation worldwide products as their own responsibility, actively follow, introduce and learn from internationally renowned brand technology, technological innovation, and forge ahead. The company currently produces dozens of a series of products with thousands of specifications, providing a wealthy of choices for customers product guarantee.

CONTENTS



Screw terminal block

  UUT Series 007	  UUK Series 022	 JUT1 Series 036
 JUK1 Series 053	 JUT2 Series 064	 JUT10 Series 073
 JUT11 Series 077	 JUT13 Series 085	 JUT17 Series 087
 JUT5 Series 090	 JUT6 Series 093	 JUT7 Series 095

Push-in terminal block

 UPT Series 099	 JUT15 Series 123	 JUT14 Series 131
---	---	---

Spring-cage terminal block

 JUT3 Series 143
--




RAIL TERMINAL BLOCK



Screw model

This model terminal block mainly consists of 4 parts including shell, bolt, line-pressing frame, and conducting strip. When the bolt is tightened, the line-pressing frame will move upward, and the wire and conducting strip will get pressed and close contact. It is the most common and most widely used terminal block in the market. It has a nice appearance. It is also equipped with a complete set of accessory parts including the end plate, group separator, contact part, fixing part and tag etc. It fits 2 types of tracks: U type and G type. The line connecting is reliable, the installation is easy, and the connecting capacity is complete.

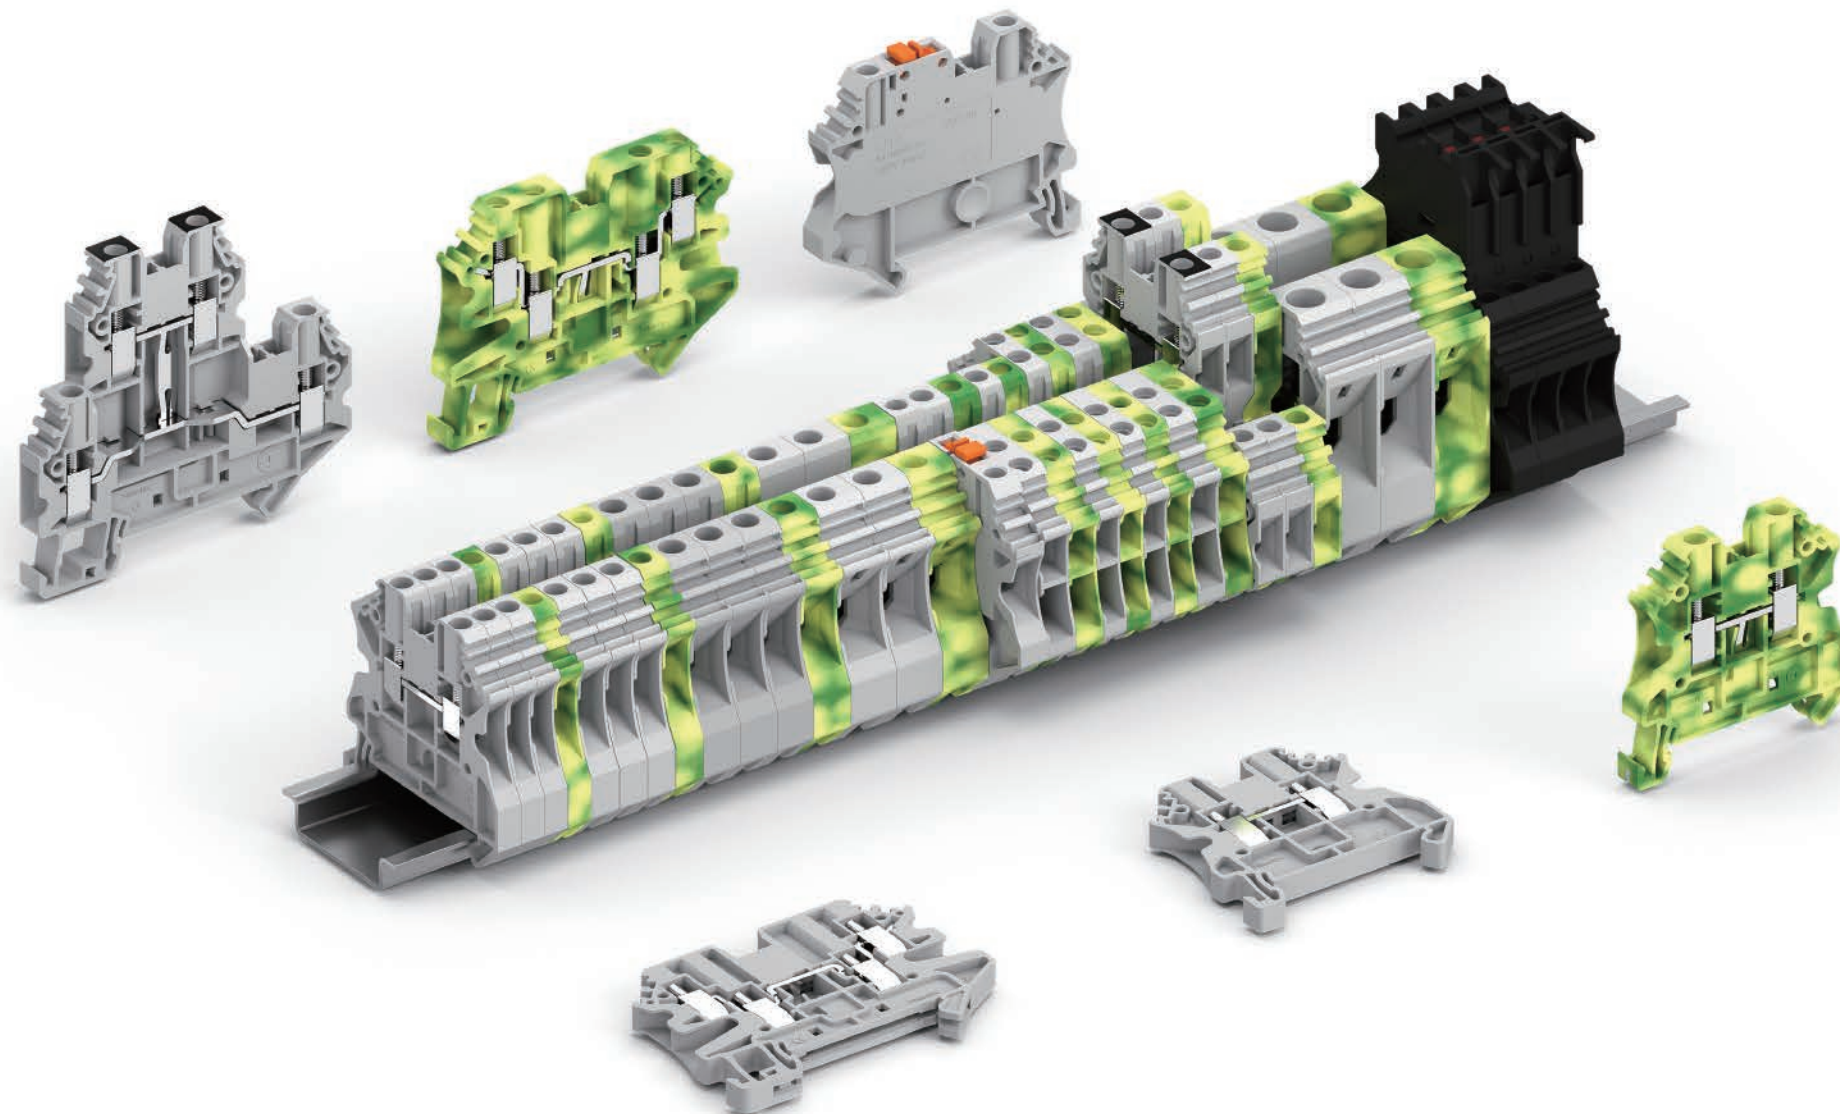

Advantage

- Terminal with universal mounting foot can conveniently and quickly installed in the U type guide rail NS35 and G type guide rail NS32.
- Screw closed guide hole is convenient screwdriver operation, and can prevent the screw loosening after dropping machine.
- Potential distribution by an access terminal central center contact piece or inserted into a conical connecting hole edge inserted contact element to realize.
- For multi-layer terminals, suitable components are provided, such as flow plates, partition boards, and separators.
- The insulated outer shell is made of high-grade engineering plastic—polyamide (nylon) 66, which has high mechanical strength, excellent electrical properties, and outstanding elasticity.
- The top two ends are lined with white markings for uniform identification.

Screw terminal block

JUT1

JUT1 SERIES


The PA66 V0-class polymer material shell is used to optimize the traditional heavy screw-type design, with clear fixing holes for easy operation.

The high-quality copper conductive plate and flange structure cable fixing design are designed to prevent loosening, large contact area provide more stable conductivity and temperature rise.


Copper crimp connectors ensure a good contact surface and provide a more secure connection; they also offer greater soldering, resulting in stronger resistance to damage under extreme conditions.

Copper screws have good corrosion resistance and the torque meets national standard requirements.

Wide range accessories, such as bridge connection, marking strips, and thick fixing feet.

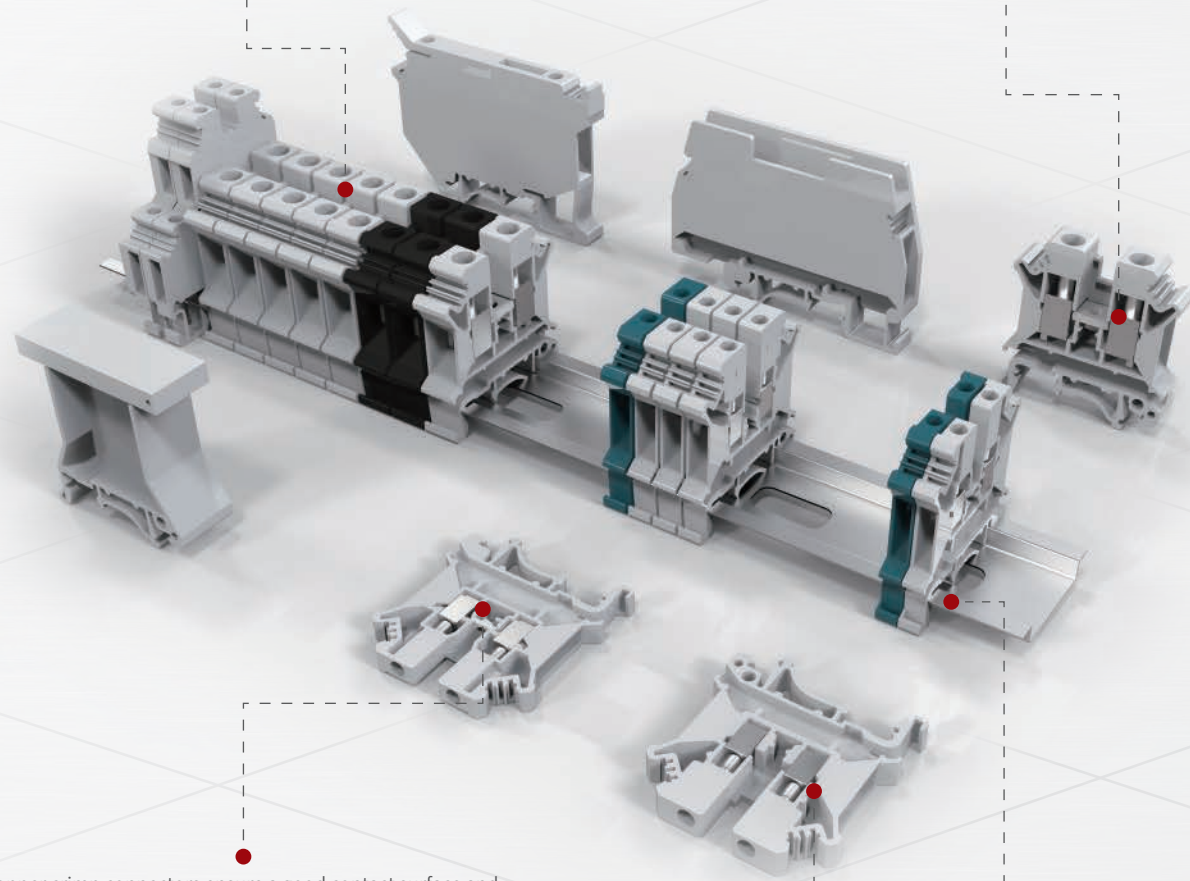

Screw terminal block JUT1 series



JUT1-1.5-GY

Feed-through terminal block

Parameters

Product complies with the standards			
IEC60947-7-1		UL 1059 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
4.2	42.5	42.0	49.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	300	10
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.14-1.5	0.14-1.5	26-16	8

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	● Grey (GY)

Model	Retail price
JUT1-1.5-GY	\$ 1.32
JUT1-1.5-BE	\$ 1.32
G-JUT1-1.5/2.5B	\$ 0.48



JUT1-1.5PE


Ground terminal block

Parameters

Product complies with the standards			
IEC60947-7-2		GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
4.2	42.5	42.0	49.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.14-1.5	0.14-1.5	26-16	8

Ordering information

Model	Retail price
JUT1-1.5PE	\$ 3.12



JUT1-2.5-GY

Feed-through terminal block


Parameters

Product complies with the standards			
IEC60947-7-1		UL 1059 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	42.5	47.0	54.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	24	600	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-2.5	24-12	8

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	● Grey (GY)

Model	Retail price
JUT1-2.5-GY	\$ 1.14
JUT1-2.5-BE	\$ 1.14
G-JUT1-2.5/10	\$ 0.48



JUT1-2.5PE

Ground terminal block


Parameters

Product complies with the standards			
IEC60947-7-2		GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	42.5	47.0	54.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-2.5	24-12	8

Ordering information

Model	Retail price
JUT1-2.5PE	\$ 3.58


Screw terminal block JUT1 series

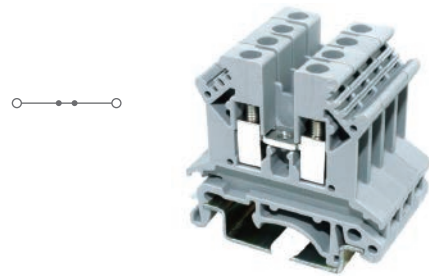

JUT1-2.5B-GY
Feed-through terminal block

Parameters				
Product complies with the standards				
IEC60947-7-1		UL 1059		GB 14048.7.1
Size information				
Width	Height	Depth	Depth ↘	
6.2	42.5	42.0	49.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
690	24	600	20	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-4	0.2-2.5	24-12	8	

Ordering information		
Model	Retail price	
JUT1-2.5B-GY	\$ 1.14	
JUT1-2.5B-BE	\$ 1.14	
G-JUT1-1.5/2.5B	\$ 0.48	

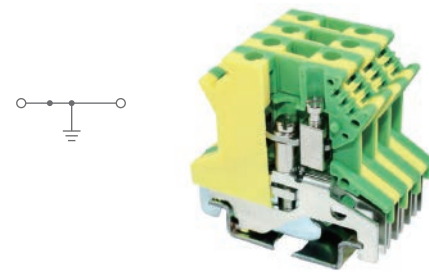


JUT1-2.5B-PE
Ground terminal block

Parameters				
Product complies with the standards				
IEC60947-7-2		GB 14048.7.2		
Size information				
Width	Height	Depth	Depth ↘	
6.2	42.5	42.0	49.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	24	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-4	0.2-2.5	24-12	8	

Ordering information		
Model	Retail price	
JUT1-2.5B-PE	\$ 3.58	


Screw terminal block JUT1 series

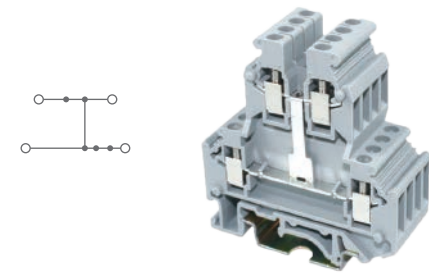

JUT1-2.5/2L-GY
Two layers terminal block (with potential distribution)-two input two output

Parameters				
Product complies with the standards				
IEC60947-7-1		GB 14048.7.1		
Size information				
Width	Height	Depth	Depth ↘	
5.2	56.0	62.0	69.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	24	300	24	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-4	0.2-2.5	24-12	8	


Ordering information		
Model	Retail price	
JUT1-2.5/2L-GY	\$ 2.18	
JUT1-2.5/2L-BE	\$ 2.18	
G-JUT1-2.5/4	\$ 0.66	

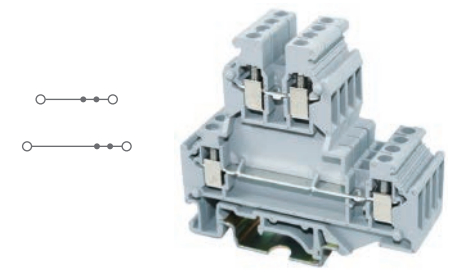

JUT1-2.5/2Q-GY
Two layers terminal block-two input two output (with bridging available for both layers)

Parameters				
Product complies with the standards				
IEC60947-7-1		GB 14048.7.1		
Size information				
Width	Height	Depth	Depth ↘	
5.2	67.0	62.0	69.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	24	300	24	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-4	0.2-2.5	24-12	8	


Ordering information		
Model	Retail price	
JUT1-2.5/2Q-GY	\$ 2.92	
JUT1-2.5/2Q-BE	\$ 2.92	
G-JUT1-2.5/4Q	\$ 0.66	

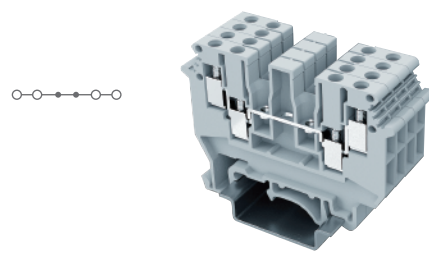

JUT1-2.5/2-2-GY
Feed-through terminal block two input two output

Parameters				
Product complies with the standards				
IEC60947-7-1		GB 14048.7.1		
Size information				
Width	Height	Depth	Depth ↘	
5.2	63.6	47.0	54.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	24	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-4	0.2-2.5	24-12	8	


Ordering information		
Model	Retail price	
JUT1-2.5/2-2-GY	\$ 2.39	
JUT1-2.5/2-2-BE	\$ 2.39	
G-JUT1-4/2-2	\$ 0.41	

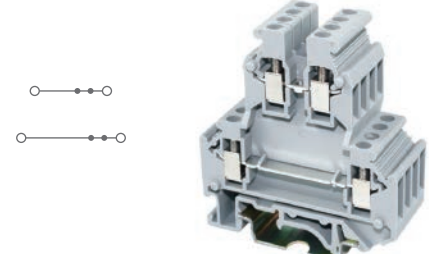

JUT1-2.5/2-GY
Two layers terminal block two input two output

Parameters				
Product complies with the standards				
IEC60947-7-1		GB 14048.7.1		
Size information				
Width	Height	Depth	Depth ↘	
5.2	56.0	62.0	69.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	24	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-4	0.2-2.5	24-12	8	


Ordering information		
Model	Retail price	
JUT1-2.5/2-GY	\$ 2.04	
JUT1-2.5/2-BE	\$ 2.04	
G-JUT1-2.5/4	\$ 0.66	

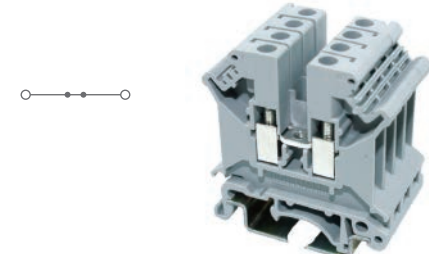

JUT1-4-GY
Feed-through terminal block

Parameters				
Product complies with the standards				
IEC60947-7-1		UL 1059		GB 14048.7.1
Size information				
Width	Height	Depth	Depth ↘	
6.2	42.5	47.0	54.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
800	32	600	30	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-6	0.2-4	24-10	10	

Ordering information		
Model	Retail price	
JUT1-4-GY	\$ 0.96	
JUT1-4-BE	\$ 0.96	
G-JUT1-2.5/10	\$ 0.32	

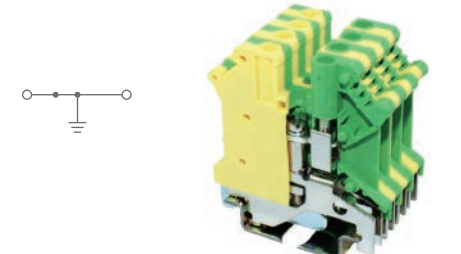


JUT1-4PE
Ground terminal block

Parameters				
Product complies with the standards				
IEC60947-7-2		GB 14048.7.2		
Size information				
Width	Height	Depth	Depth ↘	
6.2	42.5	47.0	54.5	
Electrical parameters				
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	32	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)				
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	
0.2-6	0.2-4	24-10	8	

Ordering information		
Model	Retail price	
JUT1-4PE	\$ 2.70	

Screw terminal block JUT1 series

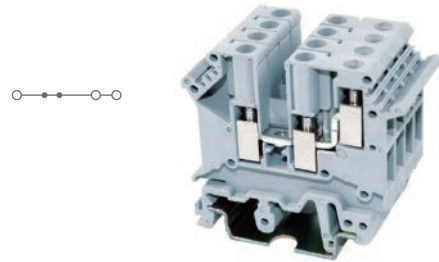


JUT1-4/1-2-GY
Feed-through terminal block
one input two output

Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	50.5	47.0	54.5
		500	32	--	--
		0.2-4	0.2-4	24-12	8

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/1-2-GY	\$ 1.93
	● Blue (BE)	JUT1-4/1-2-BE	\$ 1.93
End plate	● Yellow + Green (PE)	G-JUT1-4/1-2	\$ 0.41
	● Grey (GY)		

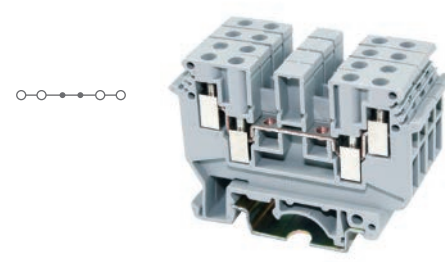


JUT1-4/2-2-GY
Feed-through terminal block
two input two output

Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	63.5	47.0	54.5
		690	32	--	--
		0.2-4	0.2-4	24-12	10

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/2-2-GY	\$ 2.22
	● Blue (BE)	JUT1-4/2-2-BE	\$ 2.22
End plate	● Yellow + Green (PE)	G-JUT1-4/2-2	\$ 0.41
	● Grey (GY)		

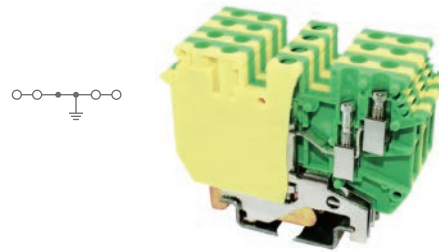


JUT1-4/2-2PE
Ground terminal block
two input two output

Parameters

Product complies with the standards		IEC60947-7-2		GB 14048.7.2	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	63.5	47.0	54.5
		690	32	--	--
		0.2-4	0.2-4	24-12	10

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/2-2PE	\$ 17.25
	● Blue (BE)		
End plate	● Yellow + Green (PE)		
	● Grey (GY)		

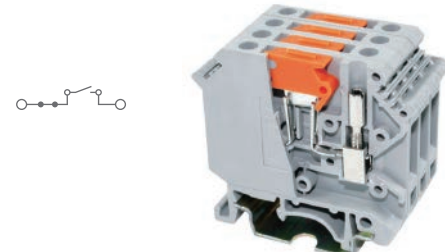

JUT1-4K-GY
Knife disconnect terminal block


Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	51.0	58.5	66.0
		800	16	--	--
		0.2-4	0.2-4	24-12	8

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4K-GY	\$ 2.80
	● Blue (BE)	JUT1-4K-BE	\$ 2.80
End plate	● Yellow + Green (PE)		
	● Grey (GY)		

Screw terminal block JUT1 series

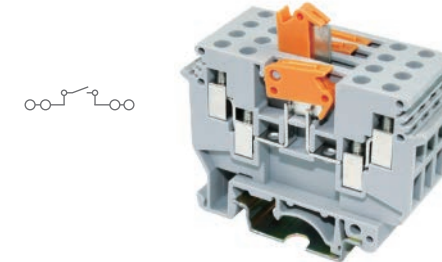


JUT1-4/2-2K-GY
Knife disconnect terminal block
two input two output

Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	63.5	47.0	54.5
		690	16	--	--
		0.2-4	0.2-4	24-12	7/14

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/2-2K-GY	\$ 14.85
	● Blue (BE)	JUT1-4/2-2K-BE	\$ 14.85
End plate	● Yellow + Green (PE)	G-JUT1-4/2-2	\$ 0.41
	● Grey (GY)		

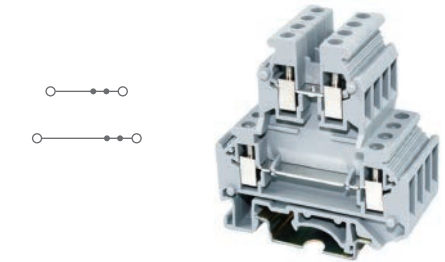


JUT1-4/2-GY
Two layers terminal block
two input two output

Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	56.0	62.0	69.5
		500	32	300	30
		0.2-4	0.2-4	24-12	8

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/2-GY	\$ 2.29
	● Blue (BE)	JUT1-4/2-BE	\$ 2.29
End plate	● Yellow + Green (PE)	G-JUT1-2.5/4	\$ 0.66
	● Grey (GY)		

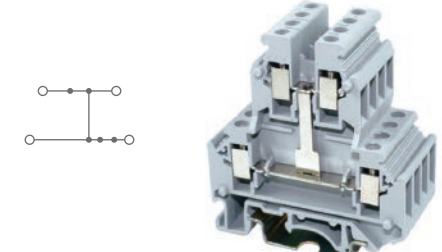


JUT1-4/2L-GY
Two layers terminal block (with potential
distribution)-two input two output

Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	56.0	62.0	69.5
		500	32	300	30
		0.2-4	0.2-4	24-12	8

Ordering information

Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/2L-GY	\$ 2.57
	● Blue (BE)	JUT1-4/2L-BE	\$ 2.57
End plate	● Yellow + Green (PE)	G-JUT1-2.5/4	\$ 0.66
	● Grey (GY)		

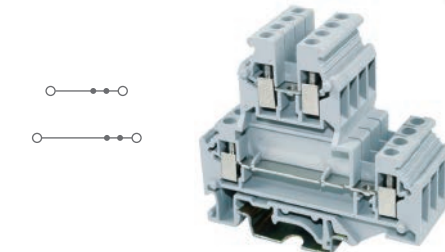

JUT1-4/2Q-GY
Two layers terminal block-two input two output
(with bridging available for both layers)


Parameters

Product complies with the standards		IEC60947-7-1		GB 14048.7.1	
Size information		Width	Height	Depth	Depth \curvearrowright
Electrical parameters		IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
Rigid wire / Flexible wire / AWG / Stripping length (mm)		Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
		6.2	56.0	62.0	69.5
		500	32	300	30
		0.2-4	0.2-4	24-12	8

Ordering information


Description	Color	Model	Retail price
Terminal block	● Grey (GY)	JUT1-4/2Q-GY	\$ 3.13
	● Blue (BE)	JUT1-4/2Q-BE	\$ 3.13
End plate	● Yellow + Green (PE)	G-JUT1-2.5/4Q	\$ 0.66
	● Grey (GY)		

Screw terminal block JUT1 series

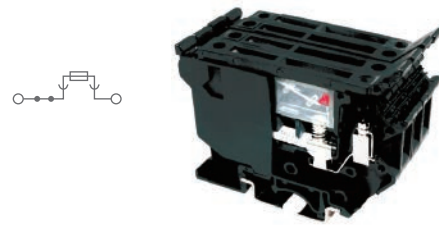


JUT1-4RD
Cantilever fuse terminal block

Parameters			
Product complies with the standards			
IEC60947-7-3	UL 1059	GB 14048.7.3	
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	72.5	56.5	64.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
AC 800	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	24-12	8
Ordering information			
Model		Retail price	
JUT1-4RD-BK		\$ 3.05	

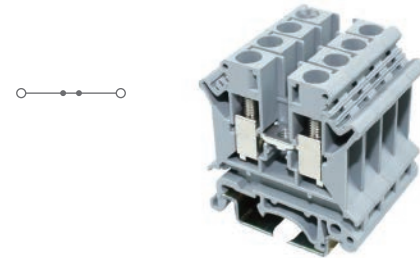


JUT1-6-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	42.5	47.0	54.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	41	600	40
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-10	0.2-6	24-8	10
Ordering information			
Model		Retail price	
JUT1-6-GY		\$ 1.45	
JUT1-6-BE		\$ 1.45	
G-JUT1-2.5/10		\$ 0.32	

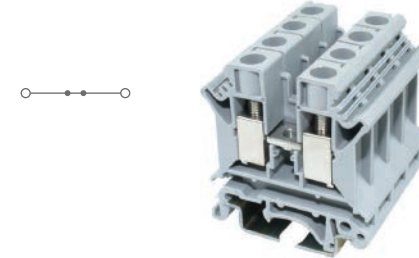


JUT1-10-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
10.2	42.5	47.0	54.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	57	600	60
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-10	20-6	12
Ordering information			
Model		Retail price	
JUT1-10-GY		\$ 2.03	
JUT1-10-BE		\$ 2.03	
G-JUT1-2.5/10		\$ 0.32	

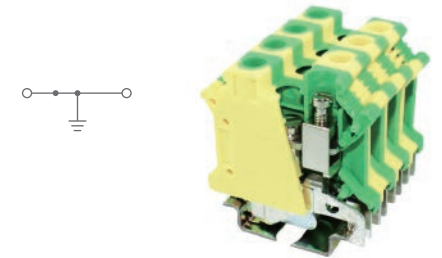


JUT1-10PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
10.2	42.5	47.0	54.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	57	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-10	20-6	12
Ordering information			
Model		Retail price	
JUT1-10PE		\$ 3.77	

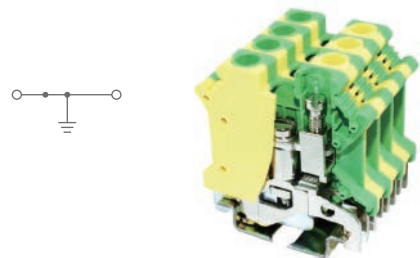


JUT1-6PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	GB 14048.7.2		
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	42.5	47.0	54.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	41	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-10	0.2-6	24-8	10
Ordering information			
Model		Retail price	
JUT1-6PE		\$ 3.19	

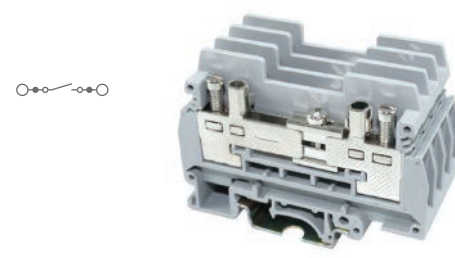


JUT1-6S-GY
Disconnection test terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	GB 14048.7.1		
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	72.0	51.5	59.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
400	41	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-6	20-8	12
Ordering information			
Model		Retail price	
JUT1-6S-GY		\$ 3.67	
JUT1-6S-BE		\$ 3.67	
G-JUT1-6S		\$ 0.70	

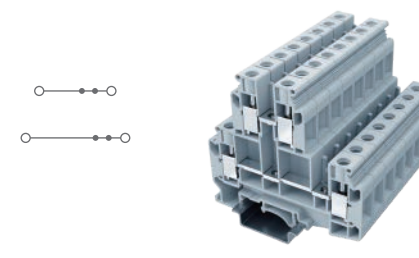

JUT1-10/2-GY
Two layers terminal block
two input two output


Parameters			
Product complies with the standards			
IEC60947-7-1	GB 14048.7.1		
Size information			
Width	Height	Depth	Depth \curvearrowright
10.2	77.7	71.8	73.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	57	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-10	20-6	9
Ordering information			
Model		Retail price	
JUT1-10/2-GY		\$ 2.51	
JUT1-10/2-BE		\$ 2.51	
G-JUT1-2.5/10		\$ 0.32	

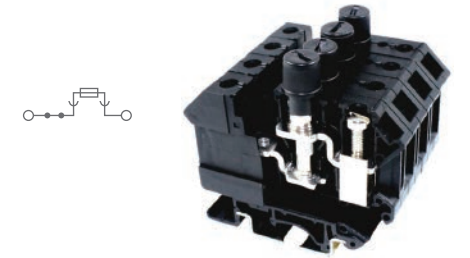

JUT1-10RD
Cantilever fuse terminal block

Parameters			
Product complies with the standards			
IEC60947-7-3	UL 1059	GB 14048.7.3	
Size information			
Width	Height	Depth	Depth \curvearrowright
12.0	62.0	59.0	66.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
AC 800	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-10	20-6	10
Ordering information			
Model		Retail price	
JUT1-10RD-BK		\$ 5.31	


Screw terminal block JUT1 series

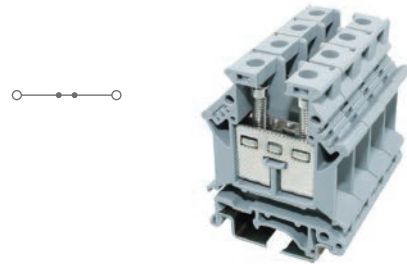

JUT1-16-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
12.2	42.5	54.0	61.5
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	76	600	85
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
2.5-25	4-16	12-4	12


Ordering information	
Model	Retail price
JUT1-16-GY	\$ 2.80
JUT1-16-BE	\$ 2.80
G-JUT1-16	\$ 0.43

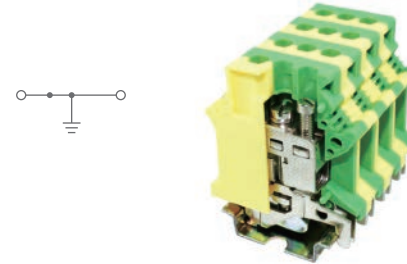

JUT1-16PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
12.2	42.5	54.0	61.5
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	76	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
2.5-25	4-16	12-4	12


Ordering information	
Model	Retail price
JUT1-16PE	\$ 0.43

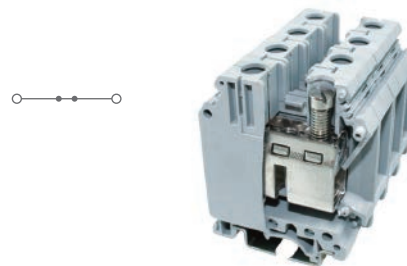

JUT1-35-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
15.2	50.0	62.0	69.5
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	125	600	115
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
2.5-35	2.5-35	14-2	18

Ordering information	
Model	Retail price
JUT1-35-GY	\$ 6.27
JUT1-35-BE	\$ 6.27

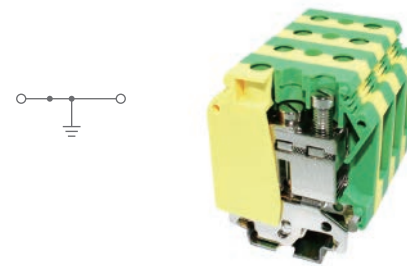


JUT1-35PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
15.2	50.0	62.0	69.5
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	125	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
2.5-35	2.5-35	14-2	18

Ordering information	
Model	Retail price
JUT1-35PE	\$ 10.61


Screw terminal block JUT1 series

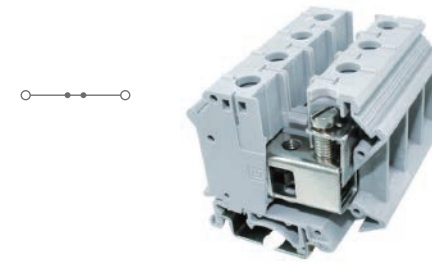

JUT1-35B-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
15.2	56.0	52.0	59.5
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	125	600	125
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
2.5-35	2.5-35	14-2	16.5


Ordering information	
Model	Retail price
JUT1-35B-GY	\$ 5.49
JUT1-35B-BE	\$ 5.49

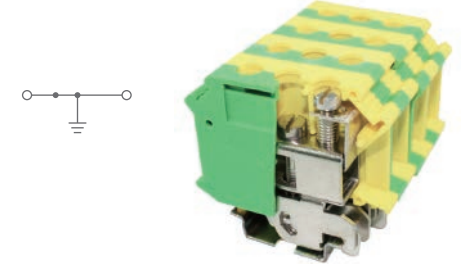

JUT1-35B-PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
15.2	56.0	52.0	59.5
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	125	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
2.5-35	2.5-35	14-2	16.5


Ordering information	
Model	Retail price
JUT1-35B-PE	\$ 5.49

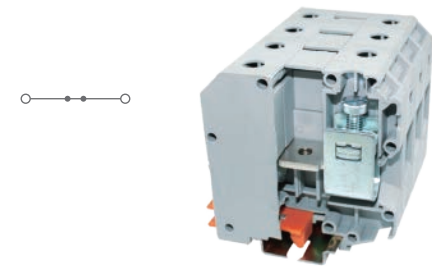

JUT1-50-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
20.2	71.3	77.2	84.7
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	150	600	150
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
16-50	25-50	--	24

Ordering information	
Model	Retail price
JUT1-50-GY	\$ 15.10
JUT1-50-BE	\$ 15.10

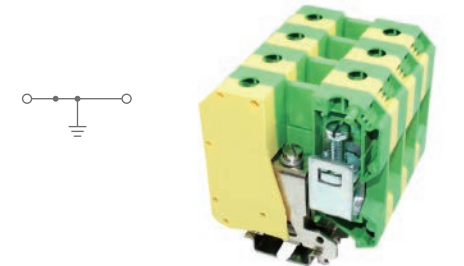


JUT1-50PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	GB 14048.7.2		
Width	Height	Depth	Depth \curvearrowright
20.0	70.5	83.5	91.0
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	150	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG
16-50	25-50	--	24

Ordering information	
Model	Retail price
JUT1-50PE	\$ 36.07

Screw terminal block JUT1 series

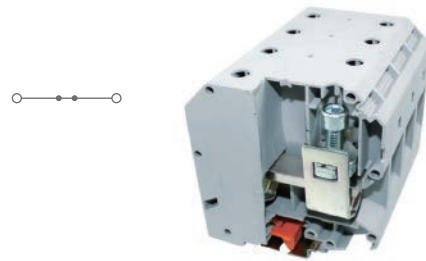

JUT1-95-GY

Feed-through terminal block

Parameters

Product complies with the standards

IEC60947-7-1 UL 1059 GB 14048.7.1



Size information

Width	Height	Depth	Depth ↘
26.0	83.6	91.6	99.1

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	232	600	230


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
25-95	35-95	--	24

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

Model	Retail price
JUT1-95-GY	\$ 20.41
JUT1-95-BE	\$ 20.41

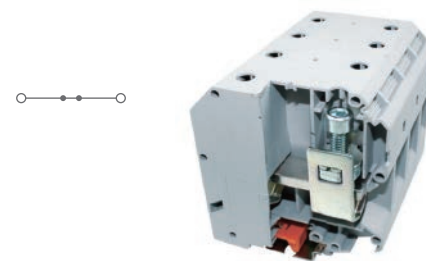

JUT1-150-GY

Feed-through terminal block

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1




Width	Height	Depth	Depth ↘
31.6	101.0	112.5	120.0

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	308	600	285

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
35-150	50-150	--	24

Ordering information

Model	Retail price
JUT1-150-GY	\$ 27.58
JUT1-150-BE	\$ 27.58

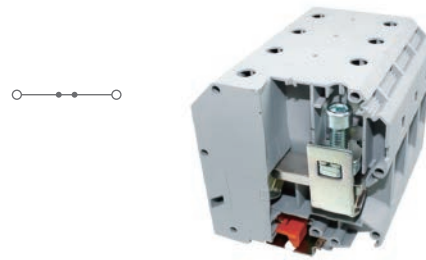

JUT1-240-GY

Feed-through terminal block

Parameters

Product complies with the standards

IEC60947-7-1 UL 1059 GB 14048.7.1



Size information

Width	Height	Depth	Depth ↘
26.0	83.6	91.6	99.1

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	415	600	380


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
70-240	70-240	--	24

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

Model	Retail price
JUT1-240-GY	\$ 46.14
JUT1-240-BE	\$ 46.14

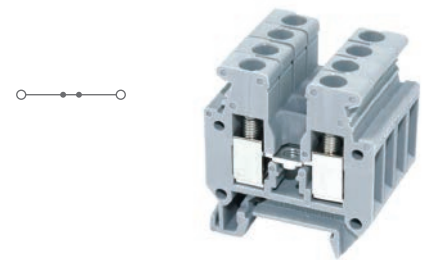

JUT1-2.5E-GY

Miniature terminal block

Parameters

IEC60947-7-1 GB 14048.7.1



Width	Height	Depth	Depth ↘
5.2	28.0	32.0	--


IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
380	24	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-2.5	24-12	8

Ordering information

Model	Retail price
JUT1-2.5E-GY	\$ 2.61
JUT1-2.5E-BE	\$ 2.61
G-JUT1-2.5/4E	\$ 0.47

Screw terminal block JUT1 series

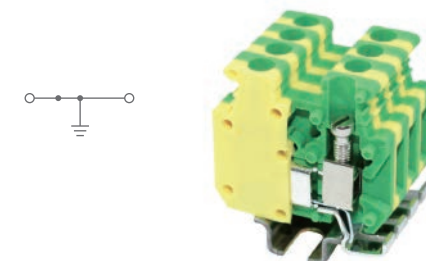

JUT1-2.5E-PE

Miniature ground terminal block

Parameters

Product complies with the standards

IEC60947-7-2 GB 14048.7.2



Size information

Width	Height	Depth	Depth ↘
5.2	28.0	32.0	--

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	24	--	--


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-2.5	24-12	8

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

Model	Retail price
JUT1-2.5E-PE	\$ 0.87

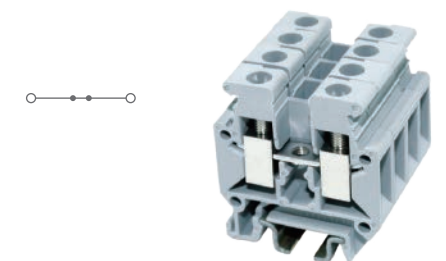

JUT1-4E-GY

Miniature terminal block

Parameters

IEC60947-7-1 GB 14048.7.1



Width	Height	Depth	Depth ↘
6.2	42.5	47.0	54.5

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	32	600	32

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-4	24-12	8

Ordering information

Model	Retail price
JUT1-4E-GY	\$ 0.97
JUT1-4E-BE	\$ 0.97
G-JUT1-2.5/4E	\$ 0.47

JUT1 SERIES

Product accessory

End plate



G-JUT1-2.5S



G-JUT1-2.5/4



G-JUT1-2.5/10



G-JUT1-2.5/4Q

Applicable to GY model products



DP-JUT1-2.5/4Q



G-JUT1-4/1-2



G-JUT1-4/2-2



G-JUT1-6S

Central adaptor



JFB

Side adaptor




JEB

Mark terminal




JUT1-B

Insulating spacer



JS-K



JS-KK3



JAP

Grouping partition



JAP-6S

Mark strip



ZB4




ZB5



ZB6



ZB8

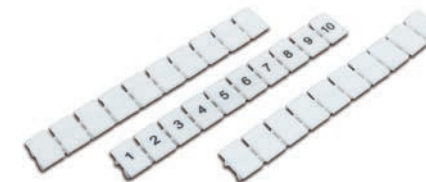


ZB10

Mark clip



KLM-A

End clamp



E/1



E/1E

JUT1 SERIES

Product accessory

Product model	End plate	Central adaptor	Side adaptor	Insulating spacer	Grouping partition	Mark strip	Mark clip	Mark terminal	End clamp	Compensation end plate
JUT1-1.5-GY JUT1-1.5PE	G-JUT1-1.5/2.5B --	JFB2-1.5 -- JFB3-1.5 -- JFB10-1.5 --	--	--	JAP --	ZB4 --	KLM-A --	--	E/1 --	--
JUT1-2.5-GY JUT1-2.5PE	G-JUT1-2.5/10 --	JFB2-2.5 -- JFB3-2.5 -- JFB10-2.5 --	JEB2-2.5 -- JEB3-2.5 -- JEB10-2.5 --	JS-K --	JAP --	ZB5 --	KLM-A --	--	E/1 --	--
JUT1-2.5B-GY JUT1-2.5B-PE	G-JUT1-1.5/2.5B --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-KK3 --	JAP --	ZB6 --	KLM-A --	--	E/1 --	--
JUT1-2.5/2-2-GY	G-JUT1-4/2-2 --	JFB2-2.5 -- JFB3-2.5 -- JFB10-2.5 --	JEB2-2.5 -- JEB3-2.5 -- JEB10-2.5 --	JS-K --	JAP --	ZB5 --	KLM-A --	--	E/1 --	--
JUT1-2.5/2-GY JUT1-2.5/2L-GY	G-JUT1-2.5/4 --	JFB2-2.5 -- JFB3-2.5 -- JFB10-2.5 --	JEB2-2.5 -- JEB3-2.5 -- JEB10-2.5 --	JS-KK3 --	--	ZB5 --	--	--	--	DG-JUT1-2.5/4 -- DP-JUT1-2.5/4 --
JUT1-2.5/2Q-GY	G-JUT1-1.5/2.5B --	JFBN2-2.5 -- JFBN3-2.5 -- JFBN10-2.5 --	JEB2-2.5 -- JEB3-2.5 -- JEB10-2.5 --	JS-KK3 --	--	ZB5 --	--	--	--	DP-JUT1-2.5/4Q --
JUT1-4-GY JUT1-4PE	G-JUT1-2.5/10 --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-K --	JAP --	ZB6 --	KLM-A --	--	E/1 --	--
JUT1-4/1-2-GY	G-JUT1-4/1-2 --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-K --	--	ZB6 --	--	--	--	--
JUT1-4/2-2-GY JUT1-4/2-2PE	G-JUT1-4/2-2 --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-KK3 --	--	ZB6 --	--	--	--	--
JUT1-4K-GY	--	--	JEB2-4 -- JEB3-4 -- JEB10-4 --	--	--	ZB6 --	--	--	--	--
JUT1-4/2-2K-GY	G-JUT1-4/2-2 --	--	JEB2-4 -- JEB3-4 -- JEB10-4 --	--	--	ZB6 --	--	--	--	--


Product model	End plate	Central adaptor	Side adaptor	Insulating spacer	Grouping partition	Mark strip	Mark clip	Mark terminal	End clamp	Compensation end plate
JUT1-4/2-GY JUT1-4/2L-GY	G-JUT1-2.5/4 --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-KK3 --	--	ZB6 --	--	--	--	DG-JUT1-2.5/4 -- DP-JUT1-2.5/4 --
JUT1-4/2Q-GY	G-JUT1-2.5/4Q --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-KK3 --	--	ZB6 --	--	--	--	DP-JUT1-2.5/4Q --
JUT1-4RD	--	--	JEB2-6 -- JEB3-6 -- JEB10-6 --	--	--	ZB8 --	--	--	--	--
JUT1-6-GY JUT1-6PE	G-JUT1-2.5/10 --	JFB2-6 -- JFB3-6 -- JFB10-6 --	JEB2-6 -- JEB3-6 -- JEB10-6 --	JS-K --	JAP --	ZB8 --	KLM-A --	--	E/1 --	--
JUT1-6S-GY	G-JUT1-6S --	JFB2-6S/S -- JFB3-6S/S -- JFB10-6S/S -- JFB2-6S/L -- JFB3-6S/L -- JFB10-6S/L --	JEB2-6 -- JEB3-6 -- JEB10-6 --	--	JAP-6S --	ZB8 --	--	--	--	--
JUT1-10-GY JUT1-10PE	G-JUT1-2.5/10 --	JFB2-10 -- JFB3-10 -- JFB10-10 --	JEB2-10 -- JEB3-10 -- JEB10-10 --	JS-K --	JAP --	ZB10 --	KLM-A --	--	E/1 --	--
JUT1-10/2-GY	G-JUT1-2.5/10 --	JFB2-10 -- JFB3-10 -- JFB10-10 --	JEB2-10 -- JEB3-10 -- JEB10-10 --	JS-K --	JAP --	ZB10 --	KLM-A --	--	E/1 --	--
JUT1-10RD	--	JFB2-16 -- JFB3-16 -- JFB10-16 --	JEB2-16 -- JEB3-16 -- JEB10-16 --	--	--	ZB12 --	--	--	--	--
JUT1-16-GY JUT1-16PE	G-JUT1-16 --	JFB2-16 -- JFB3-16 -- JFB10-16 --	JEB2-16 -- JEB3-16 -- JEB10-16 --	JS-K --	JAP --	ZB12 --	KLM-A --	--	E/1 --	--
JUT1-35-GY JUT1-35PE	--	JFB2-35 -- JFB3-35 -- JFB10-35 --	JEB2-35 -- JEB3-35 -- JEB10-35 --	JS-K --	--	ZB16 --	KLM-A --	--	E/1 --	--
JUT1-35B-GY JUT1-35B-PE	--	JFB2-35 -- JFB3-35 -- JFB10-35 --	JEB2-35 -- JEB3-35 -- JEB10-35 --	--	--	ZB16 --	--	JUT1-B1 --	E/1 --	--
JUT1-50-GY JUT1-50PE	--	JFB2-50 -- JFB3-50 -- JFB10-50 --	--	--	--	ZB16 --	--	JUT1-B1 --	E/1 --	--

Product model	End plate	Central adaptor	Side adaptor	Insulating spacer	Grouping partition	Mark strip	Mark clip	Mark terminal	End clamp	Compensation end plate
JUT1-95-GY	--	--	--	--	--	ZB16 --	--	JUT1-B1 --	E/1 --	--
JUT1-150-GY	--	--	--	--	--	ZB16 --	--	JUT1-B1 --	E/1 --	--
JUT1-240-GY	--	--	--	--	--	ZB16 --	--	JUT1-B1 --	E/1 --	--
JUT1-2.5E-GY JUT1-2.5E-PE	G-JUT1-2.5/4E --	JFB2-2.5 -- JFB3-2.5 -- JFB10-2.5 --	JEB2-2.5 -- JEB3-2.5 -- JEB10-2.5 --	JS-KK3 --	JAP-E --	ZB5 --	--	--	E/1 --	--
JUT1-4E-GY	G-JUT1-2.5/4E --	JFB2-4 -- JFB3-4 -- JFB10-4 --	JEB2-4 -- JEB3-4 -- JEB10-4 --	JS-KK3 --	JAP-E --	ZB6 --	--	--	E/1E --	--

RAIL TERMINAL BLOCK

Push-in type

In line terminal block (preferred for comprehensive environment) In line terminal is mainly composed off our parts: shell, in line button, spring and conductive sheet. When wiring, it is not necessary to use any tools to directly insert rigid wires. Flexible wires need to be equipped with terminals for use. The wires can be directly exited by pressing the button. High wiring efficiency and convenient wire withdrawal. The latest design combines the advantages of the previous generation of terminal blocks, and integrates test holes without removing wires or bridge pieces. It also provides the types of customization functions.

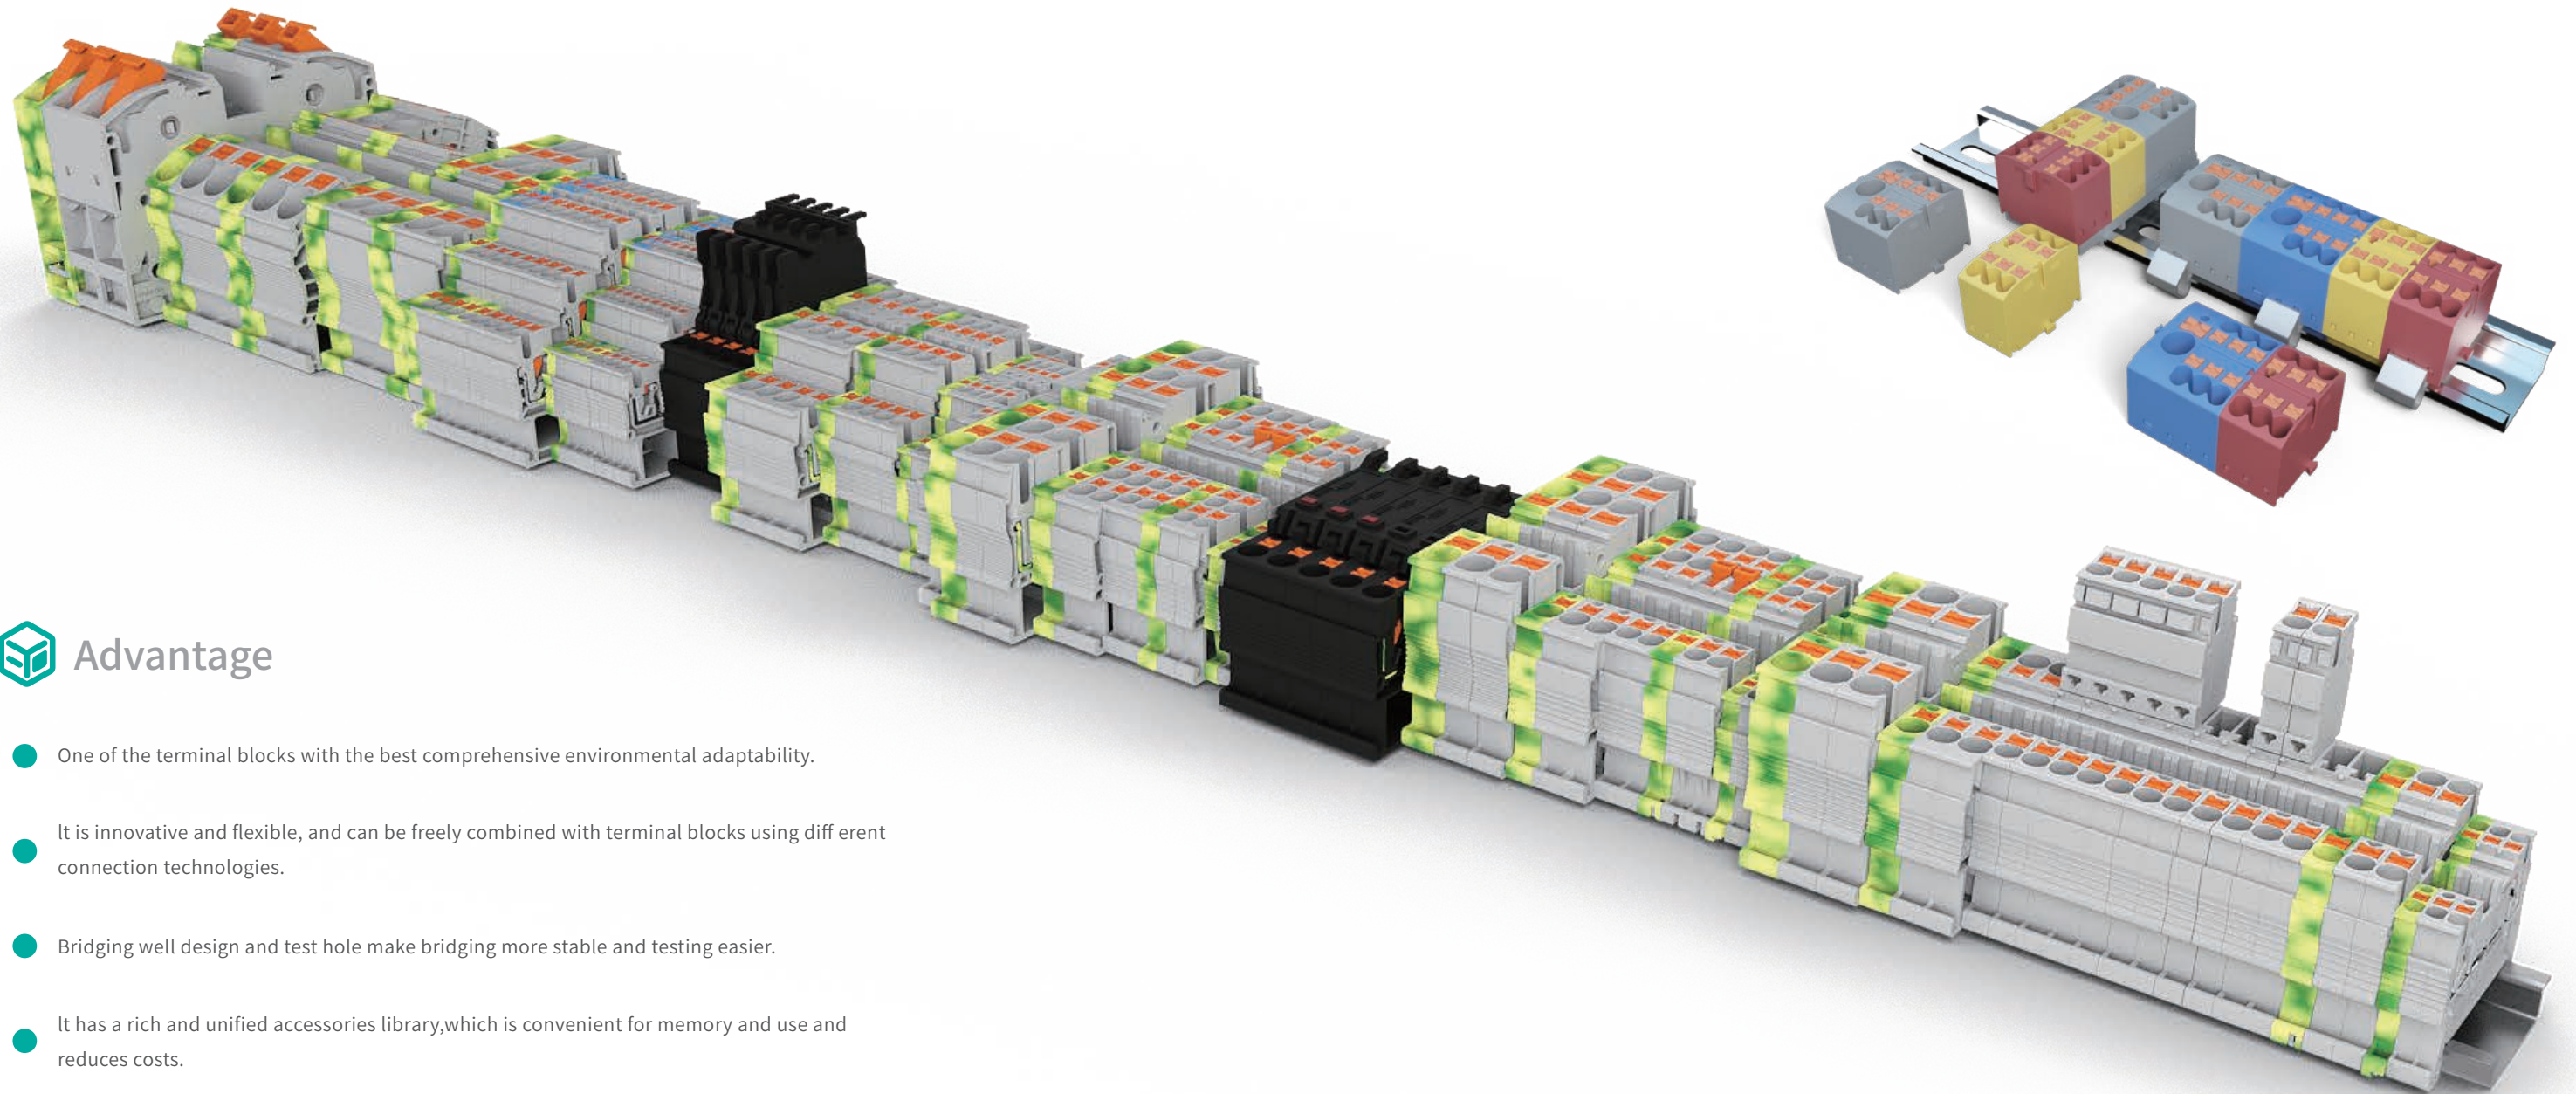

Advantage


- One of the terminal blocks with the best comprehensive environmental adaptability.
- It is innovative and flexible, and can be freely combined with terminal blocks using different connection technologies.
- Bridging well design and test hole make bridging more stable and testing easier.
- It has a rich and unified accessories library, which is convenient for memory and use and reduces costs.

Push-in terminal block

UPT SERIES

The latest PUSH-IN technology is suitable for various types of wires, with solid cable inserted directly, soft cable pressing in and release, which is convenient and fast, saving time and cost.


Using PA66 V0 grade polymer material shell and high-purity copper conductive sheet, produced with high-precision molds, reliable quality, and excellent working process.

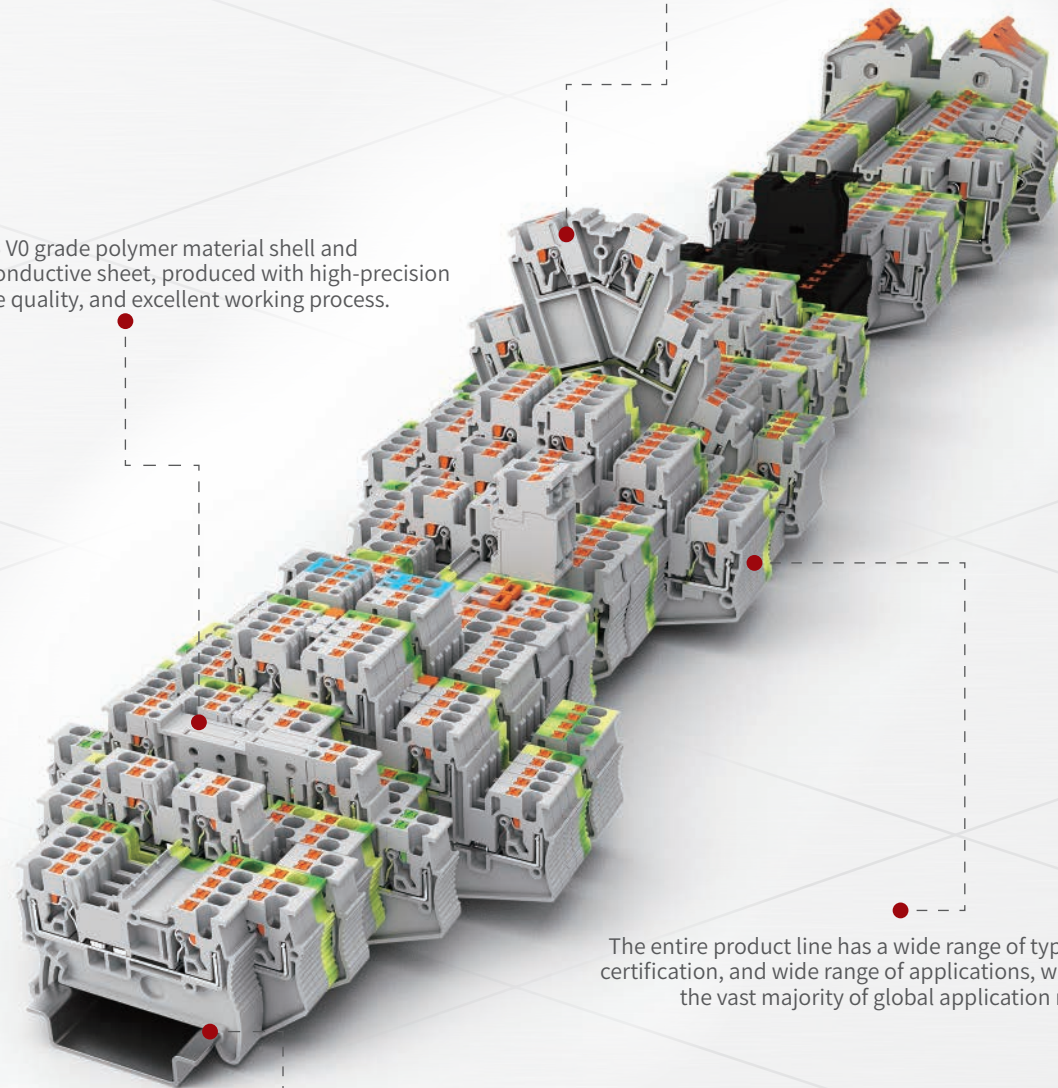

The entire product line has a wide range of types, complete certification, and wide range of applications, which can meet the vast majority of global application needs.

Offer with a variety of accessories, it has extremely high applicability and extension.

Push-in terminal block UPT series

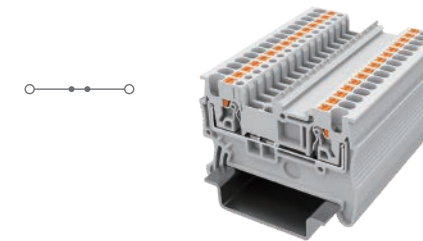

UPT-1.5-GY

Feed-through terminal block


Parameters

Product complies with the standards			
IEC60947-7-1 UL 1059 GB 14048.7.1			
CE cRU ^{us} △			
Size information			
Width	Height	Depth	Depth ↘
3.5	45.0	30.5	32.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10

Ordering information

Description		Color
Terminal block	● Grey (GY)	● Blue (BE)
	● Yellow + Green (PE)	
End plate	● Grey (GY)	

Model	Retail price
UPT-1.5-GY	\$ 1.41
UPT-1.5-BE	\$ 1.41
G-UPT-1.5	\$ 0.81

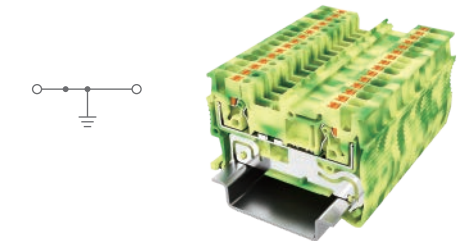

UPT-1.5PE


Ground terminal block

Parameters

Product complies with the standards			
IEC60947-7-2 UL 1059 GB 14048.7.2			
CE cRU ^{us} △			
Size information			
Width	Height	Depth	Depth ↘
3.5	45.0	30.5	32.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10

Ordering information

Model	Retail price
UPT-1.5PE	\$ 4.85
G-UPT-1.5	\$ 0.81

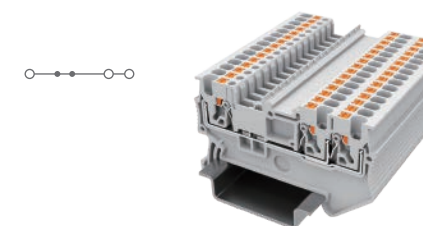

UPT-1.5/1-2-GY


Feed-through terminal block one input two output

Parameters

Product complies with the standards			
IEC60947-7-1 UL 1059 GB 14048.7.1			
CE cRU ^{us} △			
Size information			
Width	Height	Depth	Depth ↘
3.5	54.1	30.5	32.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10

Ordering information

Model	Retail price
UPT-1.5/1-2-GY	\$ 1.82
UPT-1.5/1-2-BE	\$ 1.82
G-UPT-1.5/1-2	\$ 0.85

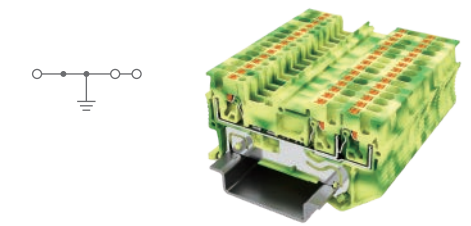

UPT-1.5/1-2PE

Ground terminal block one input two output


Parameters

Product complies with the standards			
IEC60947-7-2 UL 1059 GB 14048.7.2			
CE cRU ^{us} △			
Size information			
Width	Height	Depth	Depth ↘
3.5	54.1	30.5	32.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10

Ordering information


Model	Retail price
UPT-1.5/1-2PE	\$ 6.37
G-UPT-1.5/1-2	\$ 0.85

Push-in terminal block UPT series

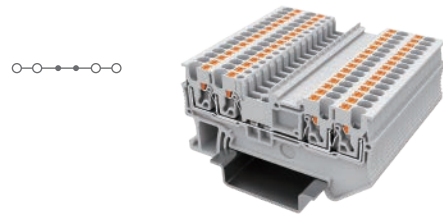

UPT-1.5/2-2-GY
Feed-through terminal block
two input two output


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	63.2	30.5	32.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/2-2-GY		\$ 1.93	
UPT-1.5/2-2-BE		\$ 1.93	
G-UPT-1.5/2-2		\$ 0.84	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

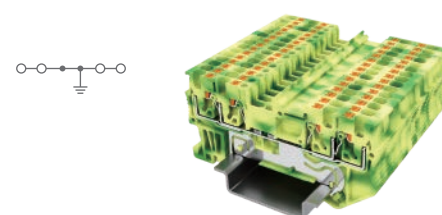

UPT-1.5/2-2-PPE
Ground terminal block
two input two output


Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	63.2	30.5	32.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/2-2-PPE		\$ 6.44	
G-UPT-1.5/2-2		\$ 0.84	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

Push-in terminal block UPT series

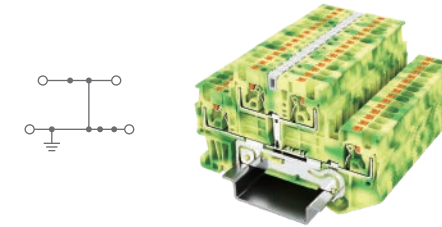


UPT-1.5/2PE
Dual layers ground terminal block
two input two output

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	65.4	41.1	42.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/2PE		\$ 10.25	
G-UPT-1.5/2		\$ 0.90	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

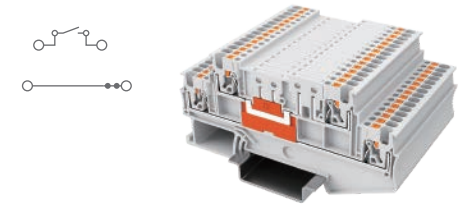


UPT-1.5/2K-GY
Double-layer knife disconnect terminal block
(upper layer can be disconnected)

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	86.0	41.1	42.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
400	9	300	10
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/2K-GY		\$ 2.78	
UPT-1.5/2K-BE		\$ 2.78	
G-UPT-1.5/2K		\$ 0.84	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

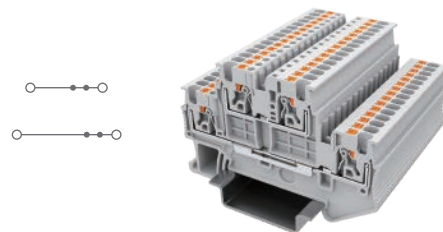


UPT-1.5/2-GY
Two layers terminal block
two input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	65.4	41.1	42.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	16	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/2-GY		\$ 2.71	
UPT-1.5/2-BE		\$ 2.71	
G-UPT-1.5/2		\$ 0.90	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

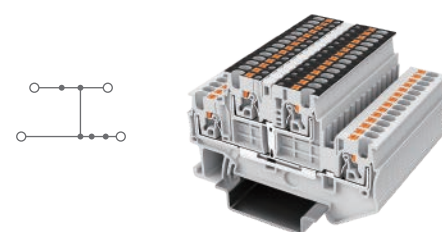


UPT-1.5/2L-GY
Two layers terminal block (with potential
distribution)-two input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	65.4	41.1	42.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	16	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/2L-GY		\$ 6.47	
UPT-1.5/2L-BE		\$ 6.47	
G-UPT-1.5/2		\$ 0.90	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

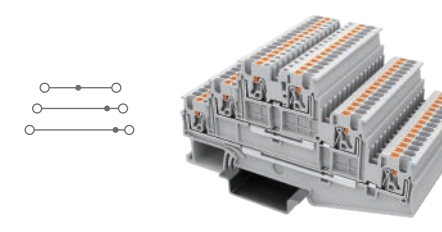

UPT-1.5/3-GY
Multi-level terminal block
with 6 connection points


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	97.3	51.7	53.2
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	15	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/3-GY		\$ 5.14	
UPT-1.5/3-BE		\$ 5.14	
G-UPT-1.5/3		\$ 1.12	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

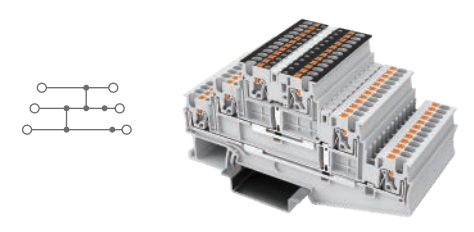

UPT-1.5/3L-GY
Multi-level terminal block (with potential
distribution) with 6 connection points


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
3.5	97.3	51.7	53.2
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	15	300	15
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-1.5	0.2-1.5	26-14	8-10
Ordering information			
Model		Retail price	
UPT-1.5/3L-GY		\$ 8.86	
UPT-1.5/3L-BE		\$ 8.86	
G-UPT-1.5/3		\$ 1.12	
Description			
Terminal block	Color		
	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 		
End plate	● Grey (GY)		

Push-in terminal block UPT series

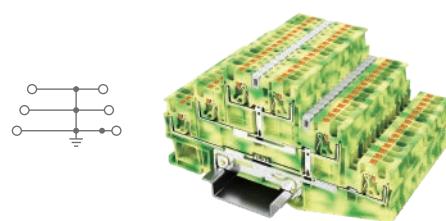

UPT-1.5/3PE
Multi-level terminal block (with ground terminal)
with 6 connection points


Parameters									
Product complies with the standards	IEC60947-7-2 UL 1059 GB 14048.7.2								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>3.5</td> <td>97.3</td> <td>51.7</td> <td>53.2</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	3.5	97.3	51.7	53.2
Width	Height	Depth	Depth ↙						
3.5	97.3	51.7	53.2						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	--	--	--	--
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
--	--	--	--						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-1.5</td> <td>0.2-1.5</td> <td>26-14</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-1.5	0.2-1.5	26-14	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-1.5	0.2-1.5	26-14	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-1.5/3PE	\$ 12.23								
G-UPT-1.5/3	\$ 1.12								

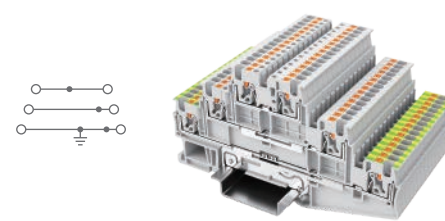

UPT-1.5PE/L/L-GY
Multi-level terminal block
with PE grounding lug


Parameters									
Product complies with the standards	IEC60947-7-1/2 UL 1059 GB 14048.7.1/2								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>3.5</td> <td>97.3</td> <td>51.7</td> <td>53.2</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	3.5	97.3	51.7	53.2
Width	Height	Depth	Depth ↙						
3.5	97.3	51.7	53.2						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>500</td> <td>15</td> <td>300</td> <td>15</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	500	15	300	15
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
500	15	300	15						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-1.5</td> <td>0.2-1.5</td> <td>26-14</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-1.5	0.2-1.5	26-14	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-1.5	0.2-1.5	26-14	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-1.5PE/L/L-GY	\$ 8.86								
UPT-1.5PE/L/L-BE	\$ 8.86								
G-UPT-1.5/3	\$ 1.12								

Push-in terminal block UPT series

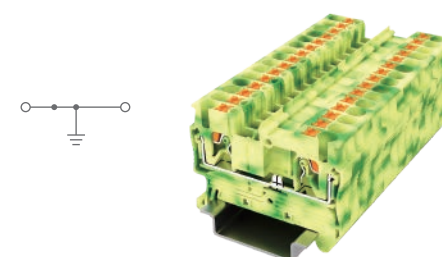


UPT-2.5PE
Ground terminal block

Parameters									
Product complies with the standards	IEC60947-7-2 UL 1059 GB 14048.7.2								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>48.6</td> <td>35.5</td> <td>36.8</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	5.2	48.6	35.5	36.8
Width	Height	Depth	Depth ↙						
5.2	48.6	35.5	36.8						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	--	--	--	--
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
--	--	--	--						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-4</td> <td>0.2-4</td> <td>26-12</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-4	0.2-4	26-12	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-4	0.2-4	26-12	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-2.5PE	\$ 2.96								
G-UPT-2.5	\$ 0.47								

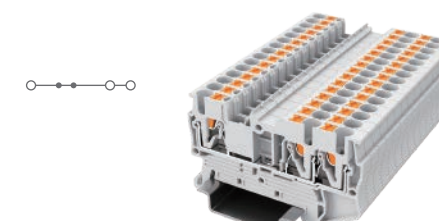


UPT-2.5/1-2-GY
Feed-through terminal block
one input two output

Parameters									
Product complies with the standards	IEC60947-7-1 UL 1059 GB 14048.7.1								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>60.4</td> <td>35.5</td> <td>36.6</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	5.2	60.4	35.5	36.6
Width	Height	Depth	Depth ↙						
5.2	60.4	35.5	36.6						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>800</td> <td>24</td> <td>600</td> <td>20</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	800	24	600	20
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
800	24	600	20						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-4</td> <td>0.2-4</td> <td>26-12</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-4	0.2-4	26-12	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-4	0.2-4	26-12	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-2.5/1-2-GY	\$ 1.00								
UPT-2.5/1-2-BE	\$ 1.00								
G-UPT-2.5/1-2	\$ 0.54								

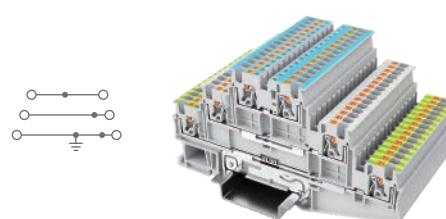


UPT-1.5PE/L/N-GY
Multi-level terminal block with PE grounding lug
(upper level in blue)

Parameters									
Product complies with the standards	IEC60947-7-1/2 UL 1059 GB 14048.7.1/2								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>3.5</td> <td>97.3</td> <td>51.7</td> <td>53.2</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	3.5	97.3	51.7	53.2
Width	Height	Depth	Depth ↙						
3.5	97.3	51.7	53.2						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>500</td> <td>15</td> <td>300</td> <td>15</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	500	15	300	15
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
500	15	300	15						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-1.5</td> <td>0.2-1.5</td> <td>26-14</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-1.5	0.2-1.5	26-14	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-1.5	0.2-1.5	26-14	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-1.5PE/L/N-GY	\$ 8.85								
UPT-1.5PE/L/N-BE	\$ 8.85								
G-UPT-1.5/3	\$ 1.12								

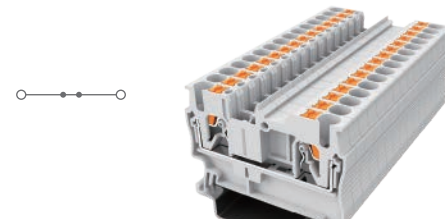


UPT-2.5-GY
Feed-through terminal block

Parameters									
Product complies with the standards	IEC60947-7-1 UL 1059 GB 14048.7.1								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>48.6</td> <td>35.5</td> <td>36.8</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	5.2	48.6	35.5	36.8
Width	Height	Depth	Depth ↙						
5.2	48.6	35.5	36.8						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>800</td> <td>24</td> <td>600</td> <td>20</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	800	24	600	20
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
800	24	600	20						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-4</td> <td>0.2-4</td> <td>26-12</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-4	0.2-4	26-12	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-4	0.2-4	26-12	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-2.5-GY	\$ 0.70								
UPT-2.5-BE	\$ 0.70								
G-UPT-2.5	\$ 0.47								

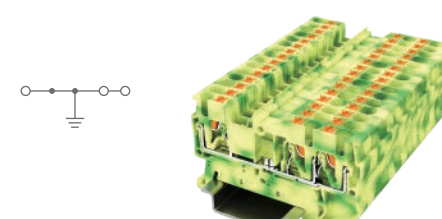

UPT-2.5/1-2PE
Ground terminal block
one input two output


Parameters									
Product complies with the standards	IEC60947-7-2 UL 1059 GB 14048.7.2								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>60.4</td> <td>35.5</td> <td>36.6</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	5.2	60.4	35.5	36.6
Width	Height	Depth	Depth ↙						
5.2	60.4	35.5	36.6						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	--	--	--	--
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
--	--	--	--						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-4</td> <td>0.2-4</td> <td>26-12</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-4	0.2-4	26-12	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-4	0.2-4	26-12	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-2.5/1-2PE	\$ 3.54								
G-UPT-2.5/1-2	\$ 0.54								

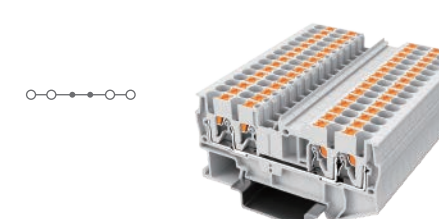

UPT-2.5/2-2-GY
Feed-through terminal block
two input two output


Parameters									
Product complies with the standards	IEC60947-7-1 UL 1059 GB 14048.7.1								
Size information	<table border="1"> <thead> <tr> <th>Width</th> <th>Height</th> <th>Depth</th> <th>Depth ↙</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>72.4</td> <td>35.5</td> <td>36.8</td> </tr> </tbody> </table>	Width	Height	Depth	Depth ↙	5.2	72.4	35.5	36.8
Width	Height	Depth	Depth ↙						
5.2	72.4	35.5	36.8						
Electrical parameters	<table border="1"> <thead> <tr> <th>IEC voltage (V)</th> <th>IEC current (A)</th> <th>UL voltage (V)</th> <th>UL current (A)</th> </tr> </thead> <tbody> <tr> <td>800</td> <td>24</td> <td>600</td> <td>20</td> </tr> </tbody> </table>	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	800	24	600	20
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)						
800	24	600	20						
Rigid wire / Flexible wire / AWG / Stripping length (mm)	<table border="1"> <thead> <tr> <th>Rigid wire (mm²)</th> <th>Flexible wire (mm²)</th> <th>AWG</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.2-4</td> <td>0.2-4</td> <td>26-12</td> <td>8-10</td> </tr> </tbody> </table>	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length	0.2-4	0.2-4	26-12	8-10
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length						
0.2-4	0.2-4	26-12	8-10						
Ordering information									
Description	Color								
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) 								
End plate	● Grey (GY)								
Ordering information									
Model	Retail price								
UPT-2.5/2-2-GY	\$ 1.33								
UPT-2.5/2-2-BE	\$ 1.33								
G-UPT-2.5/2-2	\$ 0.63								

Push-in terminal block UPT series

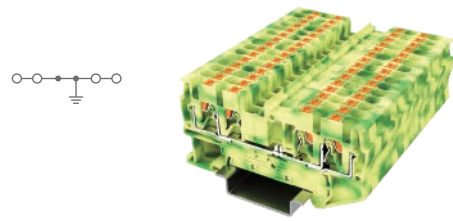

UPT-2.5/2-2PE
Ground terminal block
two input two output


Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	72.4	35.5	36.8
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/2-2PE		\$ 4.38	
G-UPT-2.5/2-2		\$ 0.63	

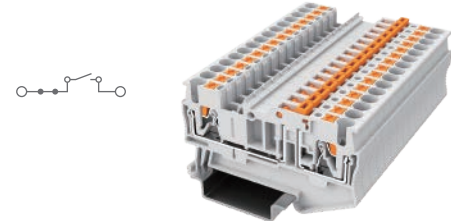

UPT-2.5K-GY
Knife switch terminal block


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	61.9	35.3	36.8
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
400	20	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5K-GY		\$ 5.30	
UPT-2.5K-BE		\$ 5.30	
G-UPT-2.5K		\$ 0.75	

Push-in terminal block UPT series

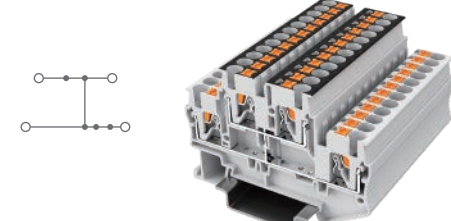


UPT-2.5/2L-GY
Two layers terminal block (with potential
distribution)-two input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	68.4	46.1	47.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	22	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/2L-GY		\$ 5.47	
UPT-2.5/2L-BE		\$ 5.47	
G-UPT-2.5/2		\$ 0.83	

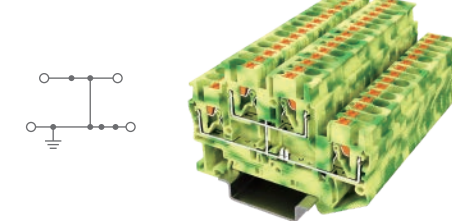


UPT-2.5/2PE
Dual layers ground terminal block
two input two output

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	68.4	46.1	47.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/2PE		\$ 7.30	
G-UPT-2.5/2		\$ 0.83	

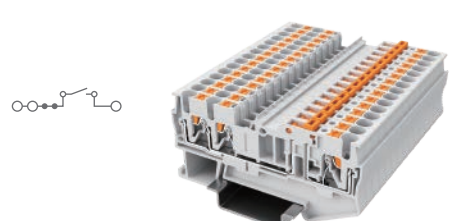


UPT-2.5/1-2K-GY
Knife disconnect terminal block
one input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	73.7	35.5	36.8
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
400	20	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/1-2K-GY		\$ 5.41	
UPT-2.5/1-2K-BE		\$ 5.41	
G-UPT-2.5/1-2K		\$ 0.80	

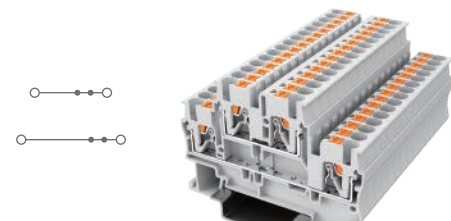


UPT-2.5/2-GY
Two layers terminal block
two input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	68.4	46.1	47.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	22	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/2-GY		\$ 2.46	
UPT-2.5/2-BE		\$ 2.46	
G-UPT-2.5/2		\$ 0.83	

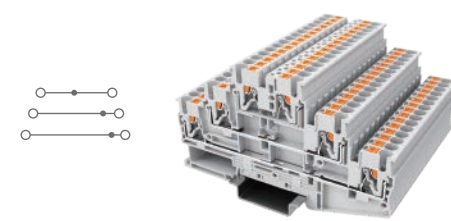

UPT-2.5/3-GY
Multi-level terminal block
with 6 connection points


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	102.2	56.5	58.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	20	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/3-GY		\$ 6.07	
UPT-2.5/3-BE		\$ 6.07	
G-UPT-2.5/3		\$ 1.27	

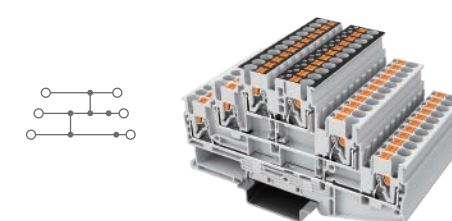

UPT-2.5/3L-GY
Multi-level terminal block (with potential
distribution) with 6 connection points


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	102.2	56.5	58.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	20	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/3L-GY		\$ 10.13	
UPT-2.5/3L-BE		\$ 10.13	
G-UPT-2.5/3		\$ 1.27	

Push-in terminal block UPT series

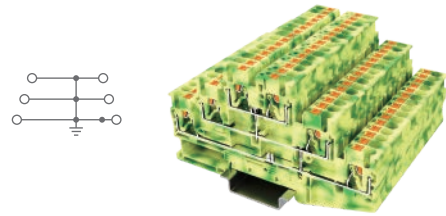


UPT-2.5/3PE
Multi-level terminal block (with ground terminal)
with 6 connection points

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	102.2	56.5	58.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/3PE		\$ 11.84	
G-UPT-2.5/3			
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

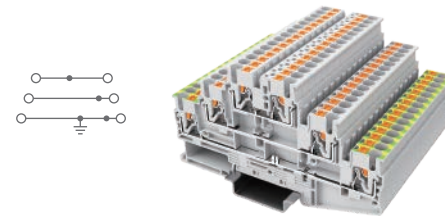


UPT-2.5PE/L/L-GY
Multi-level terminal block
with PE grounding lug

Parameters			
Product complies with the standards			
IEC60947-7-1/2	UL 1059	GB 14048.7.1/2	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	102.2	56.5	58.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	20	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5PE/L/L-GY			
UPT-2.5PE/L/L-BE			
G-UPT-2.5/3			
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

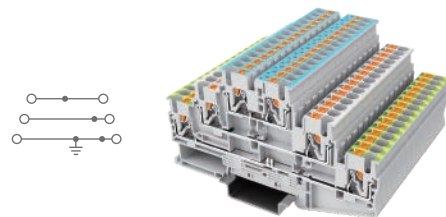

UPT-2.5PE/L/N-GY
Multi-level terminal block with PE grounding lug
(upper level in blue)


Parameters			
Product complies with the standards			
IEC60947-7-1/2	UL 1059	GB 14048.7.1/2	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	102.2	56.5	58.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	20	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5PE/L/N-GY		\$ 9.97	
UPT-2.5PE/L/N-BE		\$ 9.97	
G-UPT-2.5/3			
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

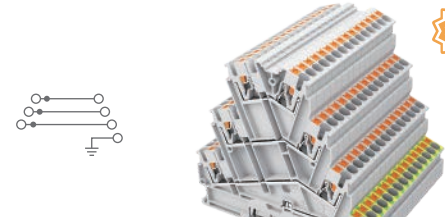

UPT-2.5-PE/3L-GY
Motor terminal block


Parameters			
Product complies with the standards			
IEC60947-7-1/2	GB 14048.7.1/2		
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	99.5	91.1	92.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	20	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5-PE/3L-GY		\$ 11.84	
UPT-2.5-PE/3L-BE		\$ 11.84	
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

Push-in terminal block UPT series

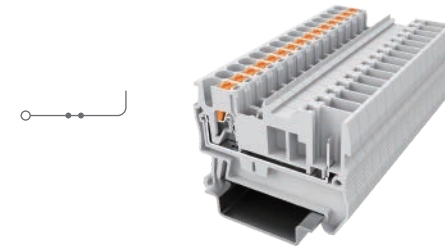


UPT-2.5/1P-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	48.6	35.5	36.8
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	24	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10
Ordering information			
Model		Retail price	
UPT-2.5/1P-GY		\$ 1.50	
UPT-2.5/1P-BE		\$ 1.50	
G-UPT-2.5/1P		\$ 0.47	
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

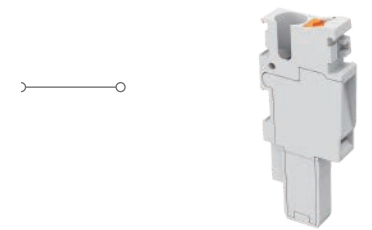


UPP-H2.5-GY
Plug

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	16.0	40.2	--
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	24	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-2.5	26-12	8-10
Ordering information			
Model		Retail price	
UPP-H2.5-GY		\$ 1.86	
UPP-H2.5-BE		\$ 1.86	
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

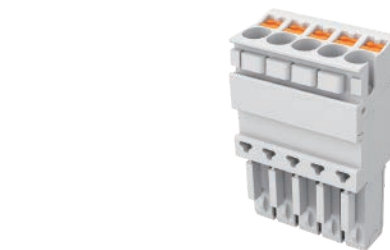

UPP-H2.5/N-GY
Plug set


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
5.2	16.0	40.2	--
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	24	300	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-2.5	26-12	8-10
Ordering information			
Model		Retail price	
UPP-H2.5/N-GY		\$ 3.06	
UPP-H2.5/N-BE		\$ 3.06	
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

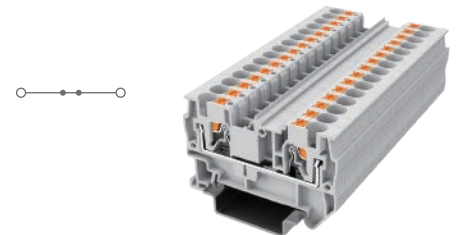

UPT-4-GY
Feed-through terminal block


Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
6.2	55.8	35.3	36.8
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	32	600	30
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12
Ordering information			
Model		Retail price	
UPT-4-GY		\$ 0.85	
UPT-4-BE		\$ 0.85	
G-UPT-4		\$ 0.48	
Description			
Terminal block		Color	
		<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 	
End plate		● Grey (GY)	

Push-in terminal block UPT series

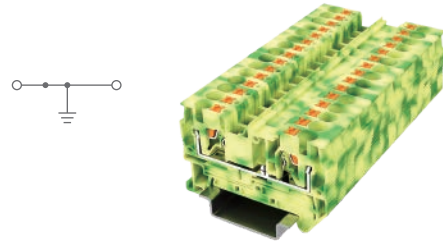



UPT-4PE
Ground terminal block

Parameters				
Product complies with the standards				
IEC60947-7-2	UL 1059	GB 14048.7.2		
Width	Height	Depth	Depth ↘	
6.2	55.8	35.3	36.8	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
--	--	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4PE	\$ 3.19			
G-UPT-4	\$ 0.48			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

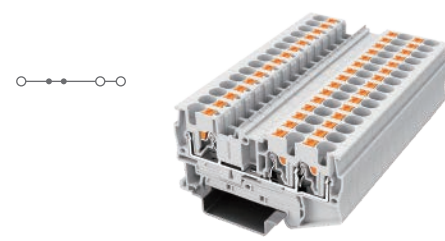


UPT-4/1-2-GY
Feed-through terminal block
one input two output

Parameters				
Product complies with the standards				
IEC60947-7-1	UL 1059	GB 14048.7.1		
Width	Height	Depth	Depth ↘	
6.2	66.4	35.3	36.8	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
800	32	600	30	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/1-2-GY	\$ 1.47			
UPT-4/1-2-BE	\$ 1.47			
G-UPT-4/1-2	\$ 0.81			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

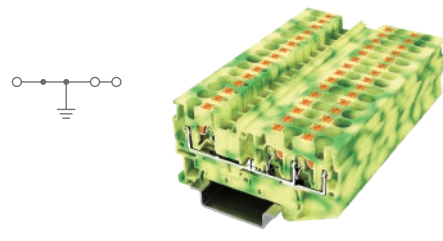

UPT-4/1-2-PE
Ground terminal block
one input two output



Parameters				
Product complies with the standards				
IEC60947-7-2	UL 1059	GB 14048.7.2		
Width	Height	Depth	Depth ↘	
6.2	66.4	35.3	36.8	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
--	--	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/1-2-PE	\$ 3.87			
G-UPT-4/1-2	\$ 0.81			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

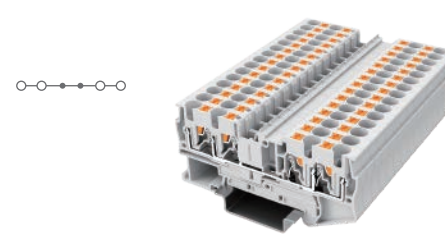

UPT-4/2-2-GY
Feed-through terminal block
two input two output


Parameters				
Product complies with the standards				
IEC60947-7-1	UL 1059	GB 14048.7.1		
Width	Height	Depth	Depth ↘	
6.2	76.9	35.3	36.8	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
800	32	600	30	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/2-2-GY	\$ 1.82			
UPT-4/2-2-BE	\$ 1.82			
G-UPT-4/2-2	\$ 0.84			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

Push-in terminal block UPT series

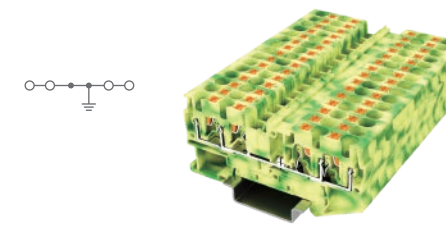


UPT-4/2-2-PE
Ground terminal block
two input two output

Parameters				
Product complies with the standards				
IEC60947-7-2	UL 1059	GB 14048.7.2		
Width	Height	Depth	Depth ↘	
6.2	76.9	35.3	36.8	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
--	--	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/2-2-PE	\$ 4.88			
G-UPT-4/2-2	\$ 0.84			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

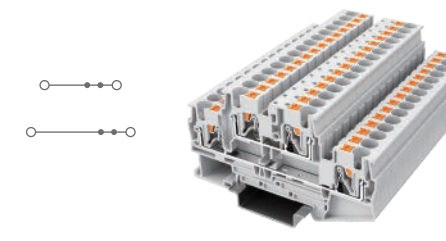


UPT-4/2-GY
Two layers terminal block
two input two output

Parameters				
Product complies with the standards				
IEC60947-7-1	UL 1059	GB 14048.7.1		
Width	Height	Depth	Depth ↘	
6.2	83.7	45.9	47.4	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	28	300	28	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/2-GY	\$ 2.82			
UPT-4/2-BE	\$ 2.82			
G-UPT-4/2	\$ 0.63			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

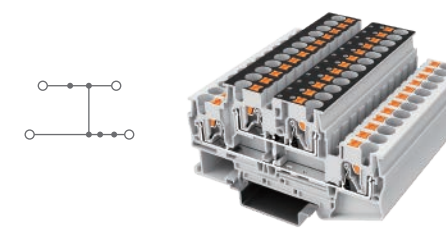

UPT-4/2L-GY
Two layers terminal block (with potential
distribution)-two input two output


Parameters				
Product complies with the standards				
IEC60947-7-1	UL 1059	GB 14048.7.1		
Width	Height	Depth	Depth ↘	
6.2	83.7	45.9	47.4	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	30	300	30	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/2L-GY	\$ 5.94			
UPT-4/2L-BE	\$ 5.94			
G-UPT-4/2	\$ 0.63			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

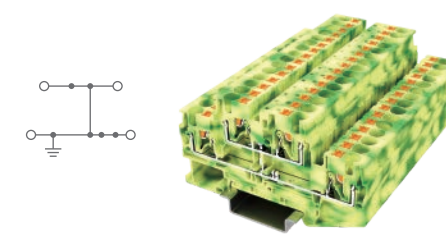

UPT-4/2PE
Dual layers ground terminal block
two input two output

Parameters				
Product complies with the standards				
IEC60947-7-2	UL 1059	GB 14048.7.2		
Width	Height	Depth	Depth ↘	
6.2	83.7	45.9	47.4	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
--	--	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12	
Ordering information				
Model	Retail price			
UPT-4/2PE	\$ 8.74			
G-UPT-4/2	\$ 0.63			
Description	Color			
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE) 			
End plate	● Grey (GY)			

Push-in terminal block UPT series

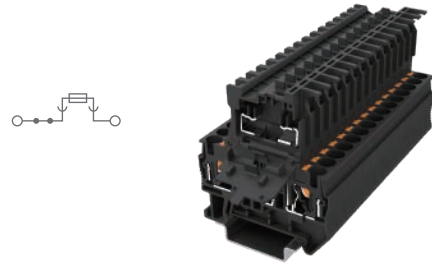

UPT-4RD

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3



Width	Height	Depth	Depth \curvearrowright
6.2	55.8	63.3	64.8
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD-BK	\$ 7.13
G-UPT-4RD	\$ 0.48


Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Black (BK) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

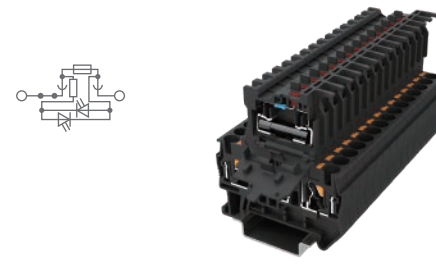

UPT-4RD/LED24

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3




Width	Height	Depth	Depth \curvearrowright
6.2	55.8	63.3	64.8
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
24	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/LED24-BK	\$ 16.29
G-UPT-4RD	\$ 0.48

Push-in terminal block UPT series

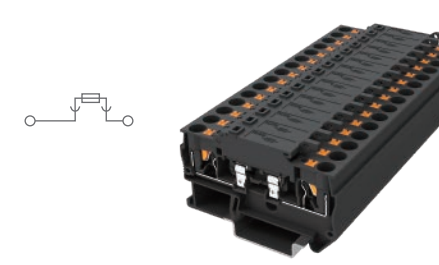

UPT-4RD/C

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3



Width	Height	Depth	Depth \curvearrowright
8.2	67.8	41.5	43.0
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/C-BK	\$ 6.41
G-UPT-4RD/C	\$ 1.30


Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Black (BK) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

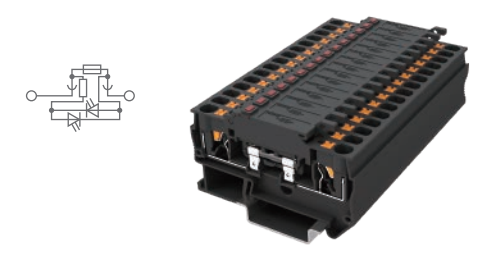

UPT-4RD/C/LED24

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3




Width	Height	Depth	Depth \curvearrowright
8.2	67.8	41.5	43.0
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
24	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/C/LED24-BK	\$ 14.12
G-UPT-4RD/C	\$ 1.30

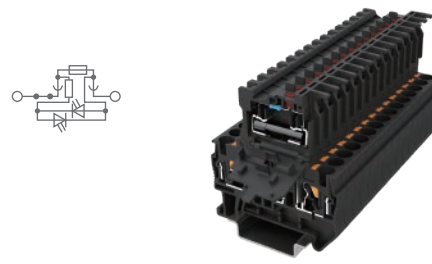

UPT-4RD/LED60

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3



Width	Height	Depth	Depth \curvearrowright
6.2	55.8	63.3	64.8
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
60	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/LED60-BK	\$ 16.43
G-UPT-4RD	\$ 0.48


Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Black (BK) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

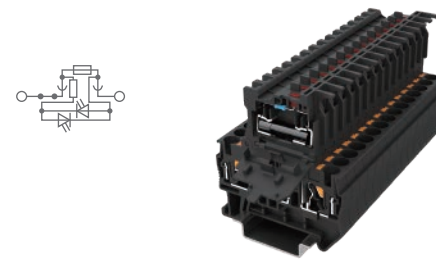

UPT-4RD/LA250

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3




Width	Height	Depth	Depth \curvearrowright
6.2	55.8	63.3	64.8
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
250	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/LA250-BK	\$ 16.81
G-UPT-4RD	\$ 0.48

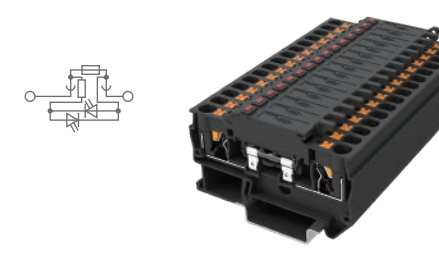

UPT-4RD/C/LED60

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3



Width	Height	Depth	Depth \curvearrowright
8.2	67.8	41.5	43.0
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
60	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/C/LED60-BK	\$ 14.12
G-UPT-4RD/C	\$ 1.30


Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Black (BK) ● Blue (BE) ● Yellow + Green (PE)
End plate	<ul style="list-style-type: none"> ● Grey (GY)

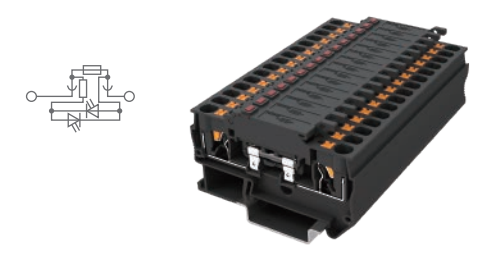

UPT-4RD/C/LA250

Cantilever fuse terminal block

Parameters

IEC60947-7-3 UL 1059 GB 14048.7.3




Width	Height	Depth	Depth \curvearrowright
8.2	67.8	41.5	43.0
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
250	6.3	300	6.3

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-6	0.2-6	24-10	10-12

Ordering information

Model	Retail price
UPT-4RD/C/LA250-BK	\$ 18.06
G-UPT-4RD/C	\$ 1.30

Push-in terminal block UPT series

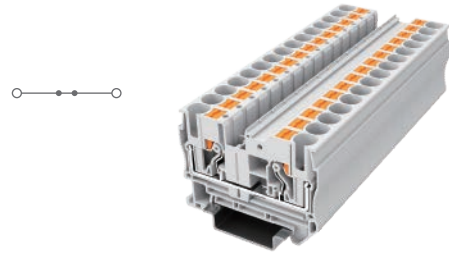

UPT-6-GY

Feed-through terminal block

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright
8.2	57.7	42.2	43.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	41	600	40

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12

Ordering information

Model	Retail price
UPT-6-GY	\$ 1.63
UPT-6-BE	\$ 1.63
G-UPT-6	\$ 0.87

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

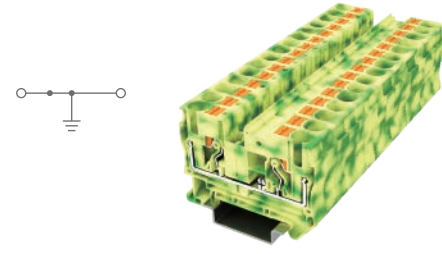

UPT-6PE

Ground terminal block

Parameters

IEC60947-7-2 UL 1059 GB 14048.7.2



Width	Height	Depth	Depth \curvearrowright
8.2	57.7	42.2	43.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12

Ordering information

Model	Retail price
UPT-6PE	\$ 5.60
G-UPT-6	\$ 0.87

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description


Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

Push-in terminal block UPT series

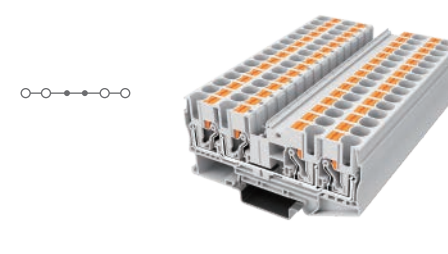

UPT-6/2-2-GY

Feed-through terminal block two input two output

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright
8.2	90.5	42.2	43.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	41	600	40

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12

Ordering information

Model	Retail price
UPT-6/2-2-GY	\$ 4.26
UPT-6/2-2-BE	\$ 4.26
G-UPT-6/2-2	\$ 0.97

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

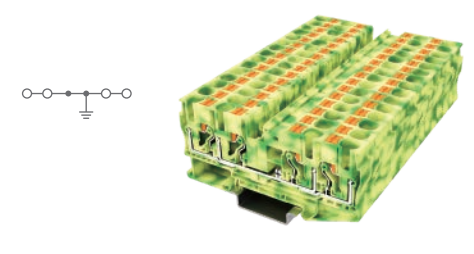

UPT-6/2-2PE

Ground terminal block two input two output

Parameters

IEC60947-7-2 UL 1059 GB 14048.7.2



Width	Height	Depth	Depth \curvearrowright
8.2	90.5	42.2	43.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12

Ordering information

Model	Retail price
UPT-6/2-2PE	\$ 9.82
G-UPT-6/2-2	\$ 0.97

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

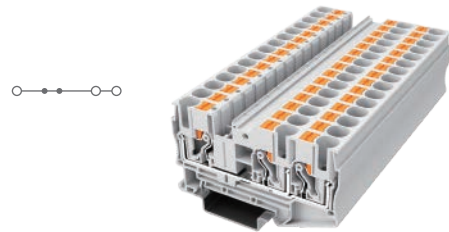

UPT-6/1-2-GY

Feed-through terminal block one input two output

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright
8.2	74.1	42.2	43.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	41	600	40

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12

Ordering information

Model	Retail price
UPT-6/1-2-GY	\$ 3.37
UPT-6/1-2-BE	\$ 3.37
G-UPT-6/1-2	\$ 0.90

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

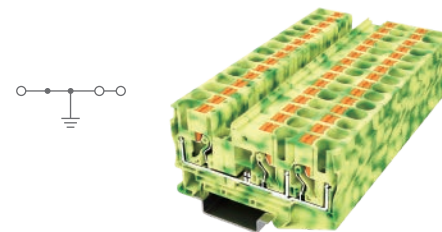

UPT-6/1-2PE

Ground terminal block one input two output

Parameters

IEC60947-7-2 UL 1059 GB 14048.7.2



Width	Height	Depth	Depth \curvearrowright
8.2	74.1	42.2	43.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12

Ordering information

Model	Retail price
UPT-6/1-2PE	\$ 7.78
G-UPT-6/1-2	\$ 0.90

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

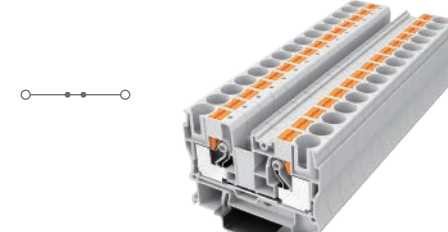

UPT-10-GY

Feed-through terminal block

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright
10.2	67.7	49.6	51.1

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	57	600	60

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-16	20-6	18

Ordering information

Model	Retail price
UPT-10-GY	\$ 3.09
UPT-10-BE	\$ 3.09
G-UPT-10	\$ 0.95

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

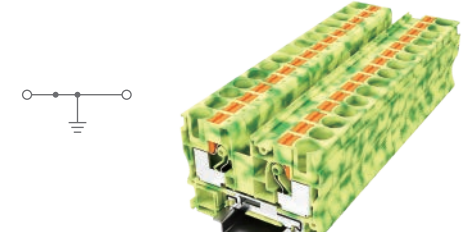

UPT-10PE

Ground terminal block

Parameters

IEC60947-7-2 UL 1059 GB 14048.7.2



Width	Height	Depth	Depth \curvearrowright
10.2	67.7	49.6	51.1

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-16	20-6	18

Ordering information

Model	Retail price
UPT-10PE	\$ 6.60
G-UPT-10	\$ 0.95

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description


Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)


Push-in terminal block UPT series

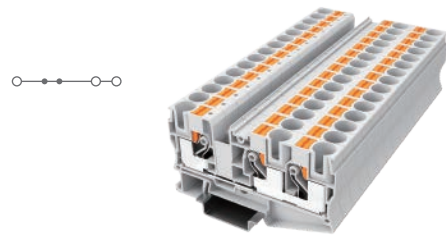

UPT-10/1-2-GY
Feed-through terminal block
one input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
10.2	74.1	42.2	43.7
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	57	600	60
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-16	20-6	18

Ordering information		
Model	Retail price	
UPT-10/1-2-GY	\$ 5.08	
UPT-10/1-2-BE	\$ 5.08	
G-UPT-10/1-2	\$ 1.33	

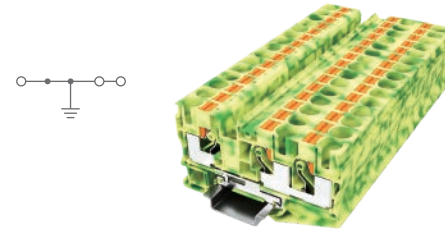

UPT-10/1-2-PE
Ground terminal block
one input two output

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
10.2	74.1	42.2	43.7
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-16	20-6	18

Ordering information		
Model	Retail price	
UPT-10/1-2PE	\$ 8.93	
G-UPT-10/1-2	\$ 1.33	

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description


Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

Push-in terminal block UPT series

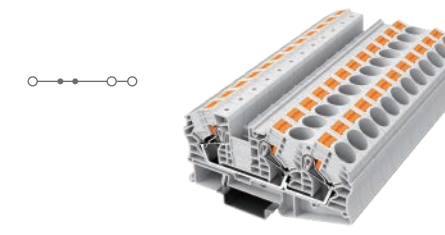

UPT-16/1-2-GY
Feed-through terminal block
one input two output

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
12.2	100.2	52.6	54.1
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	76	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-25	0.5-25	20-4	18

Ordering information		
Model	Retail price	
UPT-16/1-2-GY	\$ 8.02	
UPT-16/1-2-BE	\$ 8.02	
G-UPT-16/1-2	\$ 1.75	

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate


- Grey (GY)

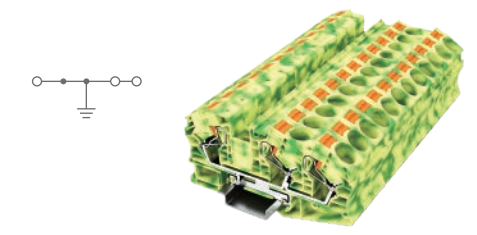

UPT-16/1-2PE
Ground terminal block
one input two output

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
12.2	100.2	53.3	52.6
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-25	0.5-25	20-4	18


Ordering information		
Model	Retail price	
UPT-16/1-2PE	\$ 15.88	
G-UPT-16/1-2	\$ 1.75	

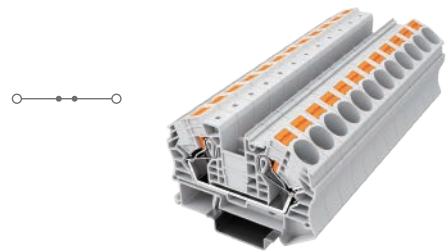

UPT-16-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
12.2	75.4	52.6	54.1
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	76	600	85
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-25	0.5-25	20-4	18

Ordering information		
Model	Retail price	
UPT-16-GY	\$ 4.97	
UPT-16-BE	\$ 4.97	
G-UPT-16	\$ 1.20	

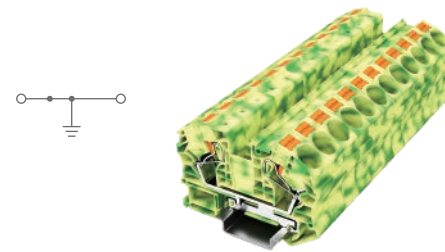

UPT-16PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
12.2	75.4	52.6	54.1
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-25	0.5-25	20-4	18

Ordering information		
Model	Retail price	
UPT-16PE	\$ 10.23	
G-UPT-16	\$ 1.20	

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate

- Grey (GY)

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)


Description

Terminal block

- Grey (GY)
- Blue (BE)
- Yellow + Green (PE)

End plate


- Grey (GY)

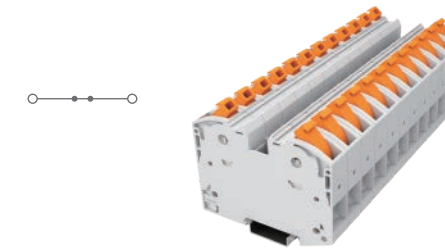

UPT-35-GY
Feed-through terminal block

Parameters			
Product complies with the standards			
IEC60947-7-1	UL 1059	GB 14048.7.1	
Width	Height	Depth	Depth \curvearrowright
16.0	91.6	76.2	77.7
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	125	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
2.5-35	2.5-35	12-2	25

Ordering information		
Model	Retail price	
UPT-35-GY	\$ 12.02	
UPT-35-BE	\$ 12.02	

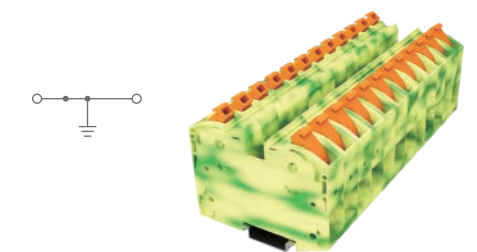

UPT-35PE
Ground terminal block

Parameters			
Product complies with the standards			
IEC60947-7-2	UL 1059	GB 14048.7.2	
Width	Height	Depth	Depth \curvearrowright
16.0	91.6	76.2	77.7
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
2.5-35	2.5-35	12-2	25

Ordering information		
Model	Retail price	
UPT-35PE	\$ 21.11	

Push-in terminal block UPT series



UPTU-35/4×6/6×2.5-GY
Potential distribution terminal block

Parameters			
IEC60947-7-1		GB 14048.7.1	
CE			
Width	Height	Depth	Depth \curvearrowright
16.0	110.4	48.8	48.8
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	105	--	--
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
2.5-35	2.5-35	12-2	25
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-10	20-8	10-12
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.2-4	0.2-4	26-12	8-10

Ordering information	
Model	Retail price
UPTU-35/4×6/6×2.5-GY	
UPTU-35/4×6/6×2.5-BE	

UPTU-35/4×10-GY
Potential distribution terminal block

Parameters			
IEC60947-7-1		GB 14048.7.1	
CE			
Width	Height	Depth	Depth \curvearrowright
19.4	79.9	50.3	50.3
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	101/57	--	--
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
2.5-35	2.5-35	12-2	25
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-16	0.5-16	20-6	18
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
--	--	--	--

Ordering information	
Model	Retail price
UPTU-35/4×10-GY	
UPTU-35/4×10-BE	

Product complies with the standards

Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description

Terminal block


End plate

- Color
- Grey (GY)
 - Blue (BE)
 - Yellow + Green (PE)
 - Grey (GY)

UPT SERIES

Product accessory


End plate

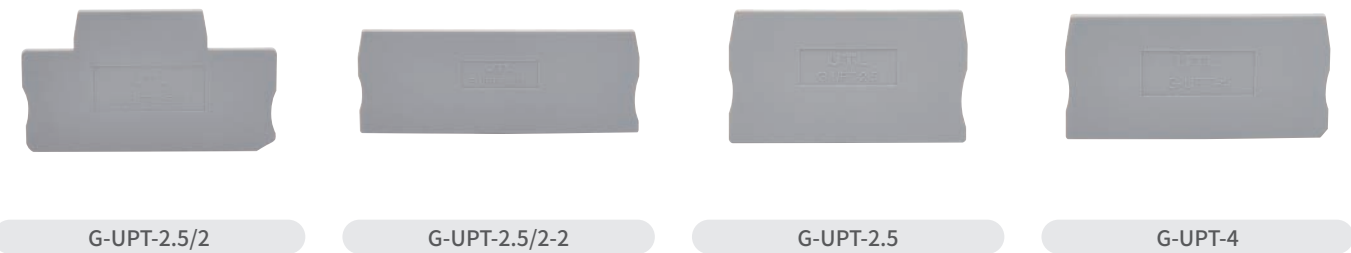

Plug-in bridge connection



Panel Mark

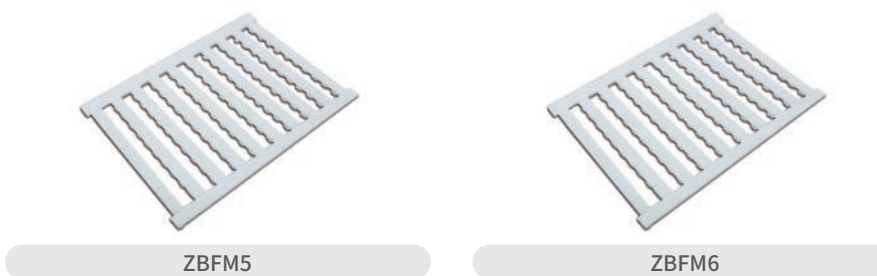

Mark strip



ZB4




ZB5



ZB6



ZB8

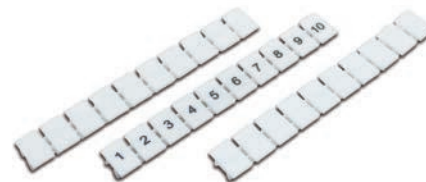

ZB10

End clamp

Compatible with all models



E/3

Mark clip

Compatible with all models



KLM-A

UPT SERIES

Product accessory

Product model	End plate	Plug-in bridge connection	Panel mark	Mark strip
UPT-1.5-GY UPT-1.5PE	G-UPT-1.5 --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	ZB3 --
UPT-1.5/1-2-GY UPT-1.5/1-2PE	G-UPT-1.5/1-2 --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	ZB3 --
UPT-1.5/2-2-GY UPT-1.5/2-2PE	G-UPT-1.5/2-2 --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	ZB3 --
UPT-1.5/2-GY UPT-1.5/2PE UPT-1.5/2L-GY	G-UPT-1.5/2 --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	--
UPT-1.5/2K-GY	G-UPT-1.5/2K --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	ZB3 --
UPT-1.5/3-GY UPT-1.5/3PE UPT-1.5/3L-GY	G-UPT-1.5/3 --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	--
UPT-1.5PE/L/L UPT-1.5PE/L/N	G-UPT-1.5/3 --	FBS2-3.5 -- FBS3-3.5 -- FBS10-3.5 --	ZBFM3.5 --	ZB3 --
UPT-2.5-GY UPT-2.5PE	G-UPT-2.5 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
UPT-2.5/1-2-GY UPT-2.5/1-2PE	G-UPT-2.5/1-2 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
UPT-2.5/2-2-GY UPT-2.5/2-2PE	G-UPT-2.5/2-2 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
UPT-2.5K-GY	G-UPT-2.5K --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
UPT-2.5/1-2K-GY	G-UPT-2.5/1-2K --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --

Product model	End plate	Plug-in bridge connection	Panel mark	Mark strip
UPT-2.5/2-GY UPT-2.5/2PE UPT-2.5/2L-GY	G-UPT-2.5/2 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	--
UPT-2.5/3-GY UPT-2.5/3L-GY UPT-2.5PE/3L	G-UPT-2.5/3 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	--
UPT-2.5PE/L/L-GY UPT-2.5PE/L/N-GY	G-UPT-2.5/3 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
UPT-2.5/1P-GY	G-UPT-2.5/1P --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
UPP-H2.5-GY UPP-H2.5/N-GY	--	--	--	--
UPT-4-GY UPT-4PE	G-UPT-4 --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	ZB6 --
UPT-4/1-2-GY UPT-4/1-2PE	G-UPT-4/1-2 --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	ZB6 --
UPT-4/2-2-GY UPT-4/2-2PE	G-UPT-4/2-2 --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	ZB6 --
UPT-4/2-GY UPT-4/2PE UPT-4/2L-GY	G-UPT-4/2 --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	--
UPT-4RD	G-UPT-4RD --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM5 --	ZB5 --
UPT-4RD/LED24 UPT-4RD/LED60 UPT-4RD/LA250	G-UPT-4RD --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	ZB6 --
UPT-4RD/C	G-UPT-4RD/C --	--	ZBFM6 --	ZB6 --
UPT-4RD/C/LED24 UPT-4RD/C/LED60 UPT-4RD/C/LA250	G-UPT-4RD/C --	--	ZBFM6 --	ZB6 --
UPT-6-GY UPT-6PE	G-UPT-6 --	JFBS2-6 -- JFBS3-6 -- JFBS10-6 --	ZBFM8 --	ZB8 --

Product model	End plate	Plug-in bridge connection	Panel mark	Mark strip
UPT-6/1-2-GY UPT-6/1-2PE	G-UPT-6/1-2 --	JFBS2-6 -- JFBS3-6 -- JFBS10-6 --	ZBFM8 --	ZB8 --
UPT-6/2-2-GY UPT-6/2-2PE	G-UPT-6/2-2 --	JFBS2-6 -- JFBS3-6 -- JFBS10-6 --	ZBFM8 --	ZB8 --
UPT-10-GY UPT-10PE	G-UPT-10 --	JFBS2-10-M02 -- JFBS3-10-M02 -- JFBS10-10-M02 --	--	ZB10 --
UPT-10/1-2-GY UPT-10/1-2PE	G-UPT-10/1-2 --	JFBS2-10-M02 -- JFBS3-10-M02 -- JFBS10-10-M02 --	--	ZB10 --
UPT-16-GY UPT-16PE	G-UPT-16 --	JFBS2-16 --	--	ZB12 --
UPT-16/1-2-GY UPT-16/1-2PE	G-UPT-16/1-2 --	JFBS2-16 --	--	ZB12 --
UPT-35-GY UPT-35PE	--	JFBS2-35 --	--	ZB16 --
UPTU-35/4×6/6×2.5-GY	--	JFBS2-6 -- JFBS3-6 -- JFBS10-6 --	--	ZB16 --
UPTU-35/4×10-GY	--	JFBS2-10 --	--	ZB16 --

RAIL TERMINAL BLOCK


JUT1

Spring-cage type


Spring terminals generally consist of a housing, cage spring, and conductive plate. When wiring, press the cage spring with a screwdriver to open the spring terminal, insert the wire, and release the screwdriver. This method offers convenient and efficient wiring, saving time and effort without the need for maintenance. The terminals have excellent anti-vibration capabilities, maximize wiring space, and save space effectively. Marking bars can be placed on the left, right, and middle sides for clear identification. The plug-in bridging component allows for easy and fast assembly and disassembly, facilitating cross-connections and saving installation time efficiently.

Advantage

- There are two wire connection points on each side of the pull-type spring terminal, which can solve the potential distribution problem.
- Using pull-type spring terminals can avoid using too many bridging components, which can shorten the length of the terminal block, keep the structure layout of the terminal block clear, and save wiring costs.

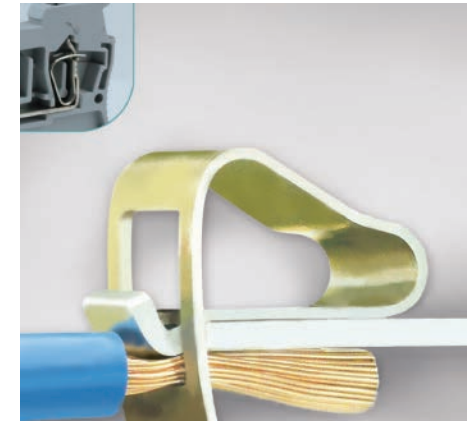

JUT1

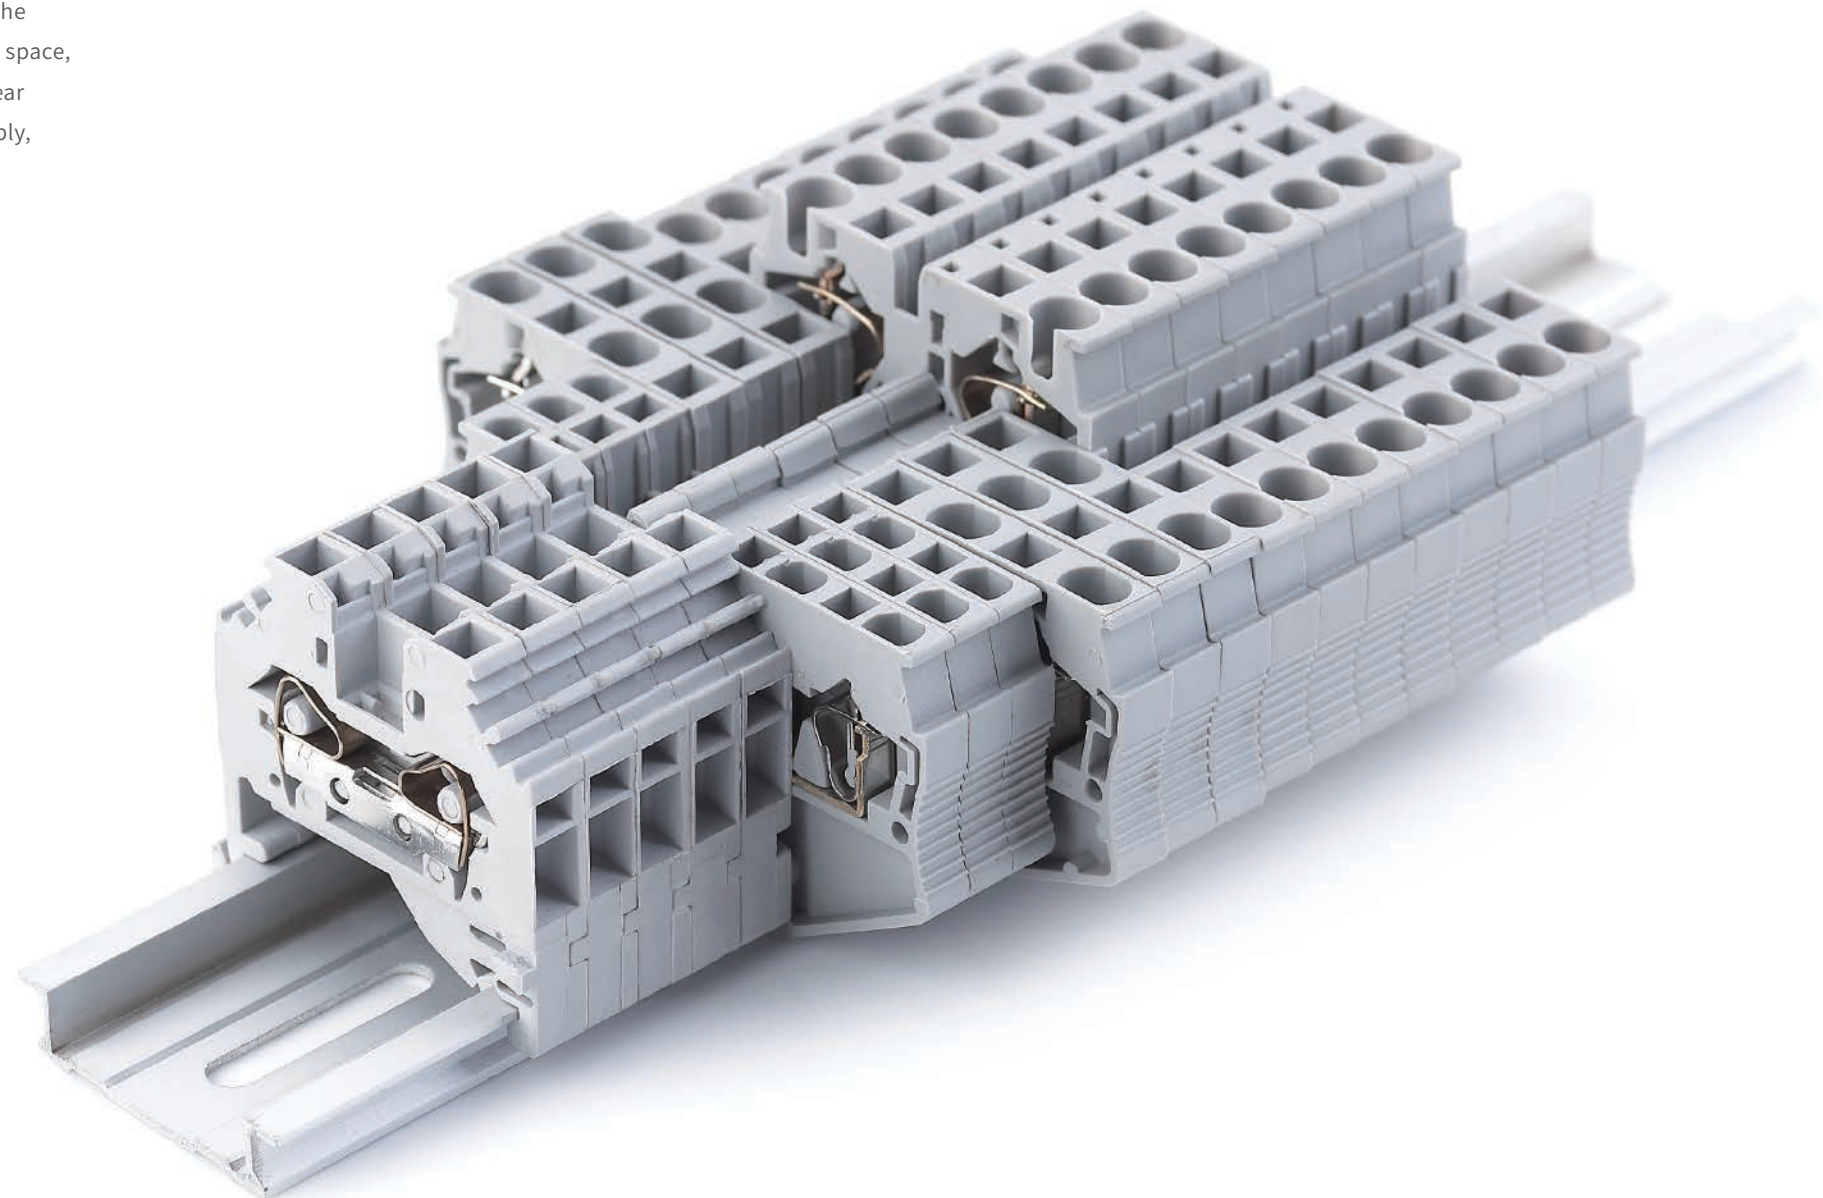


Spring-cage terminal block

JUT3 SERIES



The exquisite cage spring cable fixing structure has high stability, excellent vibration adaption, and strong environmental adaptability.


Using PA66 V0 class polymer material shell and high-quality copper conductive sheet, the material is quite stable.

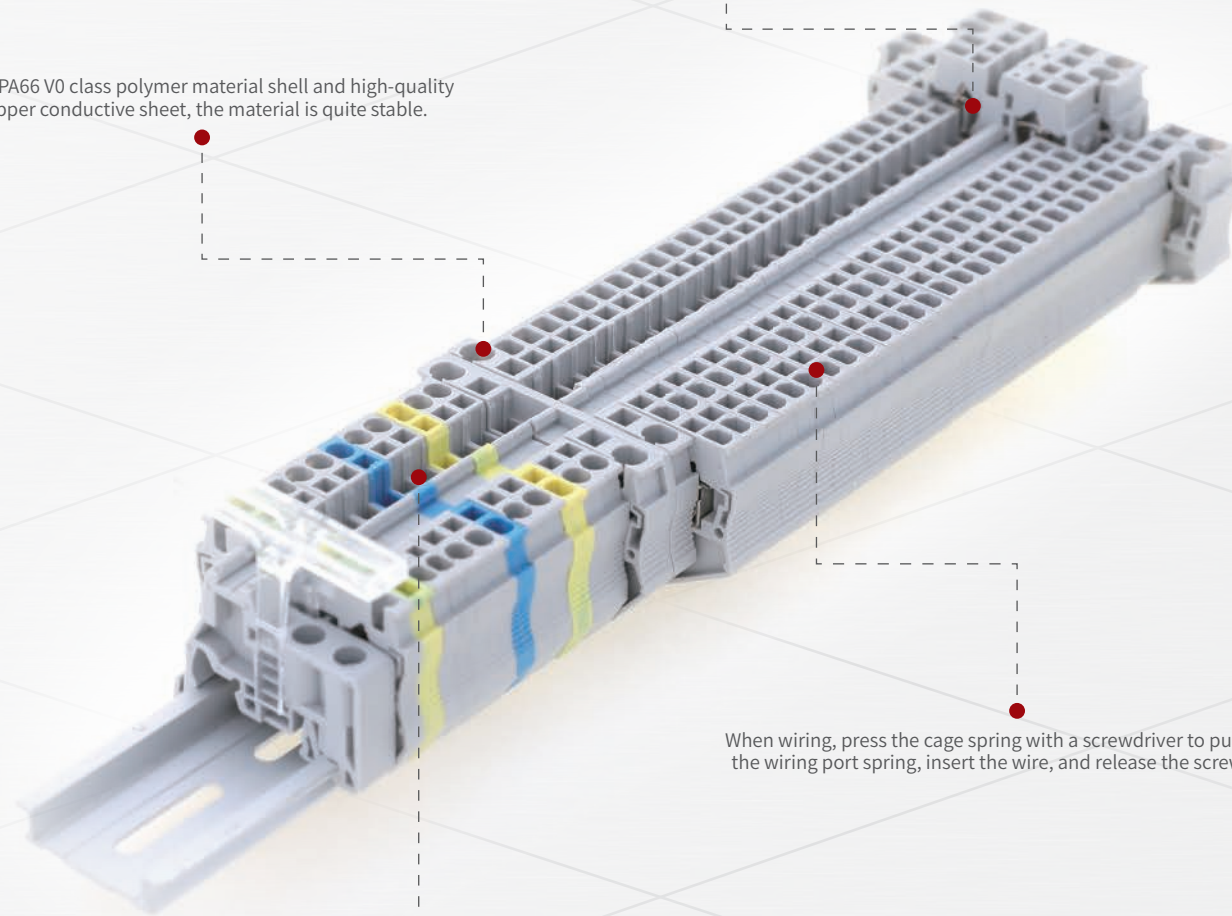

When wiring, press the cage spring with a screwdriver to push open the wiring port spring, insert the wire, and release the screwdriver.

The design of the bridging connection not only allows for easy testing with test plug, but also saves bridging space, making the terminal layout clear.

Spring-cage terminal block JUT3 series

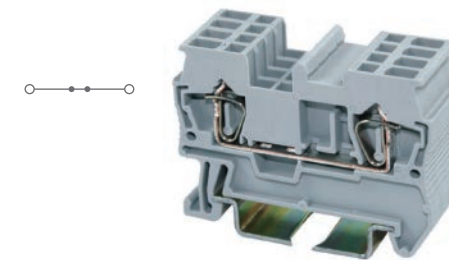


JUT3-1.5-GY
Feed-through terminal block

Parameters			
Product complies with the standards IEC60947-7-1 UL 1059 GB 14048.7.1			
CE cRU us			
Size information			
Width	Height	Depth	Depth ↘
4.2	48.5	36.5	44.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	600	10
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.14-2.5	0.14-1.5	26-16	8-9

Description		Color
Terminal block	● Grey (GY)	● Blue (BE)
	● Yellow + Green (PE)	
End plate	● Grey (GY)	


Ordering information	
Model	Retail price
JUT3-1.5-GY	\$ 0.77
JUT3-1.5-BE	\$ 0.77
G-JUT3-1.5/2.5	\$ 0.41

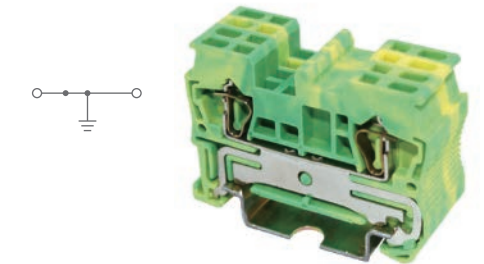

JUT3-1.5PE
Ground terminal block

Parameters			
Product complies with the standards IEC60947-7-2 GB 14048.7.2			
CE			
Size information			
Width	Height	Depth	Depth ↘
4.2	48.5	36.5	44.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.14-2.5	0.14-1.5	26-16	8-9

Ordering information	
Model	Retail price
JUT3-1.5PE	\$ 2.95
G-JUT3-1.5/2.5	\$ 0.41

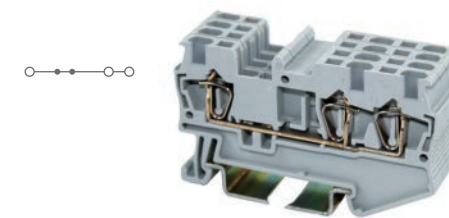


JUT3-1.5/1-2-GY
Feed-through terminal block
one input two output

Parameters			
Product complies with the standards IEC60947-7-1 GB 14048.7.1			
CE			
Size information			
Width	Height	Depth	Depth ↘
4.2	60.5	36.5	44.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.14-2.5	0.14-1.5	26-16	8-9

Description		Color
Terminal block	● Grey (GY)	● Blue (BE)
	● Yellow + Green (PE)	
End plate	● Grey (GY)	

Ordering information	
Model	Retail price
JUT3-1.5/1-2-GY	\$ 1.18
JUT3-1.5/1-2-BE	\$ 1.18
G-JUT3-2.5/1-2	\$ 0.59

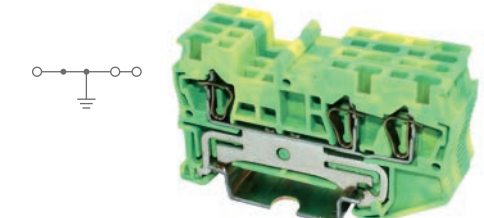


JUT3-1.5/1-2PE
Ground terminal block
one input two output

Parameters			
Product complies with the standards IEC60947-7-2 GB 14048.7.2			
CE			
Size information			
Width	Height	Depth	Depth ↘
4.2	60.5	36.5	44.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.14-2.5	0.14-1.5	26-16	8-9

Ordering information	
Model	Retail price
JUT3-1.5/1-2PE	\$ 3.12
G-JUT3-2.5/1-2	\$ 0.59

Spring-cage terminal block JUT3 series

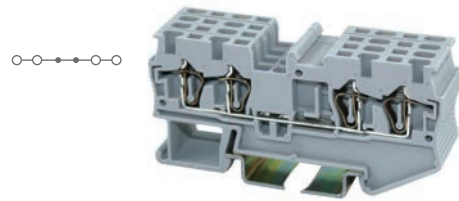


JUT3-1.5/2-2-GY
Feed-through terminal block
two input two output

Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
CE	10kV			
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	72.0	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	500	17.5	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.14-2.5	0.14-1.5	26-16	8-9

Ordering information

	Model	Retail price
Terminal block	JUT3-1.5/2-2-GY	\$ 1.53
	JUT3-1.5/2-2-BE	\$ 1.53
End plate	G-JUT3-2.5/2-2	\$ 0.67

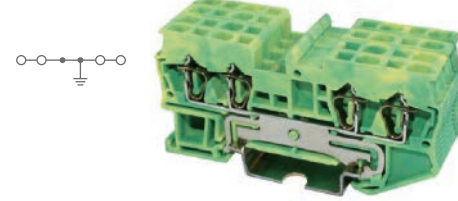

JUT3-1.5/2-2-PE
Ground terminal block
two input two output


Parameters

Product complies with the standards	IEC60947-7-2	GB 14048.7.2		
CE				
Size information	Width	Height	Depth	Depth \curvearrowright
	4.2	72.0	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.14-2.5	0.14-1.5	26-16	8-9

Ordering information

	Model	Retail price
Terminal block	JUT3-1.5/2-2-PE	\$ 3.38
	G-JUT3-2.5/2-2	\$ 0.67

Spring-cage terminal block JUT3 series

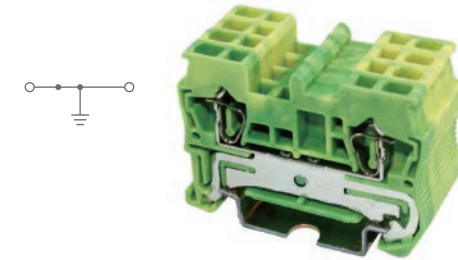


JUT3-2.5PE
Ground terminal block

Parameters

Product complies with the standards	IEC60947-7-2	GB 14048.7.2		
CE	10kV			
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	48.5	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

	Model	Retail price
Terminal block	JUT3-2.5PE	\$ 3.13
	G-JUT3-1.5/2.5	\$ 0.41
End plate		

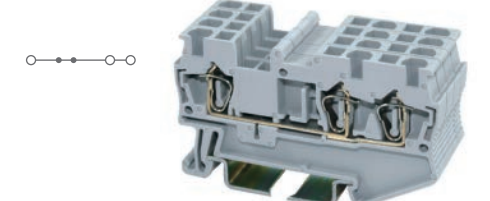


JUT3-2.5/1-2-GY
Feed-through terminal block
one input two output

Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
CE	10kV			
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	60.5	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	800	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

	Model	Retail price
Terminal block	JUT3-2.5/1-2-GY	\$ 1.49
	JUT3-2.5/1-2-BE	\$ 1.49
End plate	G-JUT3-2.5/1-2	\$ 0.59

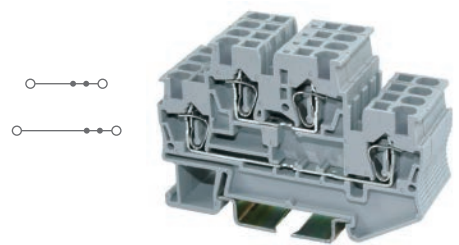


JUT3-1.5/2-GY
Two layers terminal block
two input two output

Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
CE	10kV			
Size information	Width	Height	Depth	Depth \curvearrowright
	4.2	67.5	49.0	56.5
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	500	17.5	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.14-2.5	0.14-1.5	26-16	8-9

Ordering information

	Model	Retail price
Terminal block	JUT3-1.5/2-GY	\$ 1.65
	JUT3-1.5/2-BE	\$ 1.65
End plate	G-JUT3-2.5/2	\$ 0.80

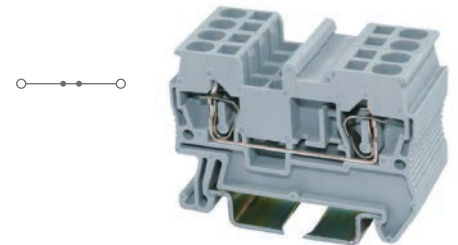


JUT3-2.5-GY
Feed-through terminal block

Parameters

Product complies with the standards	IEC60947-7-1	UL 1059	GB 14048.7.1	
CE	UL US	10kV		
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	48.5	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	800	31	600	20
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

	Model	Retail price
Terminal block	JUT3-2.5-GY	\$ 0.77
	JUT3-2.5-BE	\$ 0.77
End plate	G-JUT3-1.5/2.5	\$ 0.41

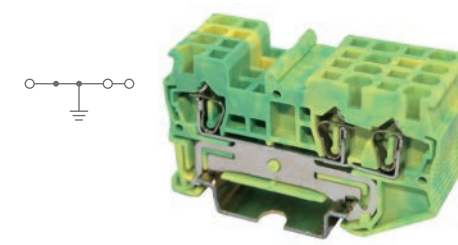


JUT3-2.5/1-2-PE
Ground terminal block
one input two output

Parameters

Product complies with the standards	IEC60947-7-2	GB 14048.7.2		
CE				
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	60.5	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

	Model	Retail price
Terminal block	JUT3-2.5/1-2-PE	\$ 3.53
	G-JUT3-2.5/1-2	\$ 0.59
End plate		

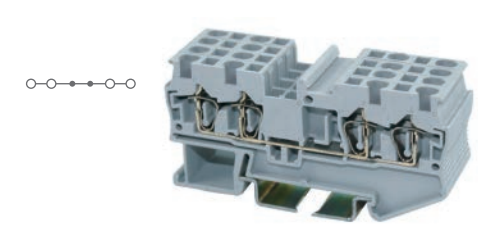

JUT3-2.5/2-2-GY
Feed-through terminal block
two input two output


Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
CE	10kV			
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	72.0	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	800	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

	Model	Retail price
Terminal block	JUT3-2.5/2-2-GY	\$ 0.67
	JUT3-2.5/2-2-BE	\$ 0.67
End plate	G-JUT3-2.5/2-2	\$ 0.67

Spring-cage terminal block JUT3 series

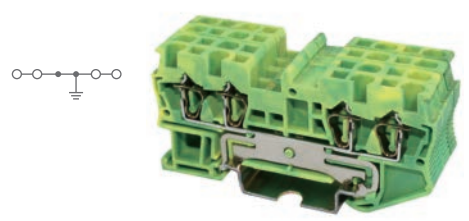


JUT3-2.5/2-PPE
Ground terminal block
two input two output

Parameters

Product complies with the standards	IEC60947-7-2	GB 14048.7.2		
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	72.0	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

Model	Retail price
JUT3-2.5/2-PPE	\$ 3.94
G-JUT3-2.5/2-2	\$ 0.67

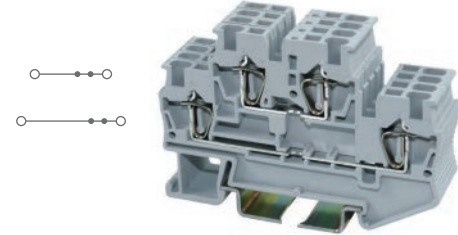

JUT3-2.5/2-GY
Two layers terminal block
two input two output


Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	67.5	49.0	56.5
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	500	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

Model	Retail price
JUT3-2.5/2-GY	\$ 1.95
JUT3-2.5/2-BE	\$ 1.95
G-JUT3-2.5/2	\$ 0.80

Spring-cage terminal block JUT3 series

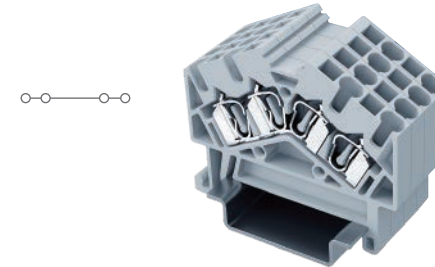


JUT3-2.5/2-2X-GY
Diagonal four wire wiring terminal block

Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	50.5	41.0	44.3
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	660	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

Model	Retail price
JUT3-2.5/2-2X-GY	
JUT3-2.5/2-2X-BE	

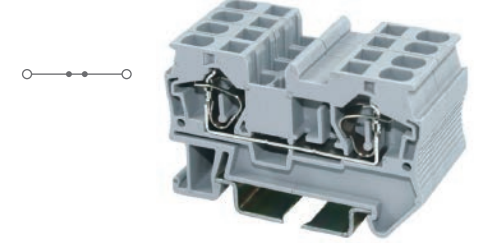

JUT3-4-GY
Feed-through terminal block

Parameters

Product complies with the standards	IEC60947-7-1	UL 1059	GB 14048.7.1	
Size information	Width	Height	Depth	Depth \curvearrowright
	6.2	56.0	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	800	41	600	30
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.5-6	0.5-4	24-10	10

Ordering information

Model	Retail price
JUT3-4-GY	\$ 1.05
JUT3-4-BE	\$ 1.05
G-JUT3-4	\$ 0.53




JUT3-2.5/2L-GY
Two layers terminal block (with potential
distribution)-two input two output

Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	67.5	49.0	56.5
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	500	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

Model	Retail price
JUT3-2.5/2L-GY	\$ 2.18
JUT3-2.5/2L-BE	\$ 2.18
G-JUT3-2.5/2	\$ 0.80

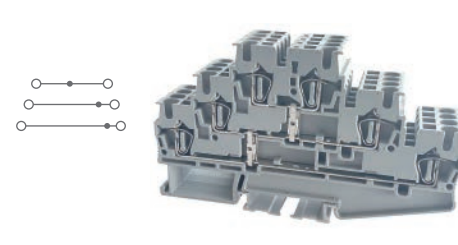


JUT3-2.5/3-GY
Multi-level terminal block
with 6 connection points

Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
Size information	Width	Height	Depth	Depth \curvearrowright
	5.2	67.5	47.5	55.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	500	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.2-4	0.2-2.5	24-12	10

Ordering information

Model	Retail price
JUT3-2.5/3-GY	\$ 4.05
JUT3-2.5/3-BE	\$ 4.05
G-JUT3-2.5/3	\$ 1.15

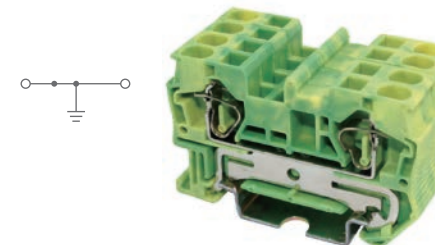


JUT3-4PE
Ground terminal block

Parameters

Product complies with the standards	IEC60947-7-2	GB 14048.7.2		
Size information	Width	Height	Depth	Depth \curvearrowright
	6.2	56.0	36.5	44.0
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.5-6	0.5-4	24-10	10

Ordering information

Model	Retail price
JUT3-4PE	\$ 3.74
G-JUT3-4	\$ 0.53

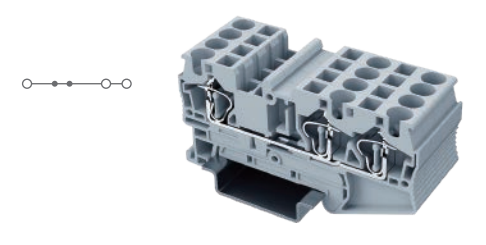

JUT3-4/1-2-GY
Feed-through terminal block
one input two output


Parameters

Product complies with the standards	IEC60947-7-1	GB 14048.7.1		
Size information	Width	Height	Depth	Depth \curvearrowright
	6.2	71.5	36.5	36.5
Electrical parameters	IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
	800	32	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
	0.5-6	0.5-4	24-10	10

Ordering information


Model	Retail price
JUT3-4/1-2-GY	\$ 2.12
JUT3-4/1-2-BE	\$ 2.12
G-JUT3-2.5/1-2	\$ 0.59

Spring-cage terminal block JUT3 series

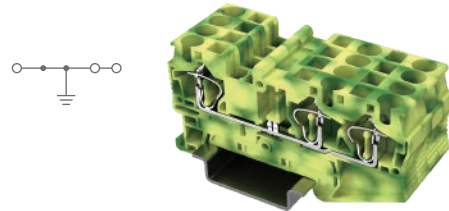


JUT3-4/1-2PE
Ground terminal block
one input two output

Parameters			
Product complies with the standards		IEC60947-7-2 GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
6.2	71.5	36.5	36.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-6	0.5-4	24-10	10
Ordering information			
Model		Retail price	
JUT3-4/1-2PE		\$ 2.12	
G-JUT3-2.5/1-2		\$ 0.59	

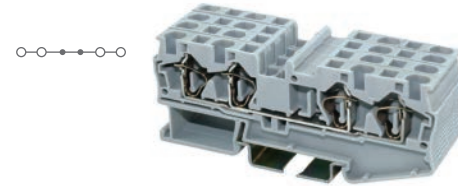


JUT3-4/2-2-GY
Feed-through terminal block
two input two output

Parameters			
Product complies with the standards		IEC60947-7-1 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
6.2	87.0	36.5	44.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	40	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-6	0.5-4	24-10	10
Ordering information			
Model		Retail price	
JUT3-4/2-2-GY		\$ 2.47	
JUT3-4/2-2-BE		\$ 2.47	
G-JUT3-4/2-2		\$ 0.99	

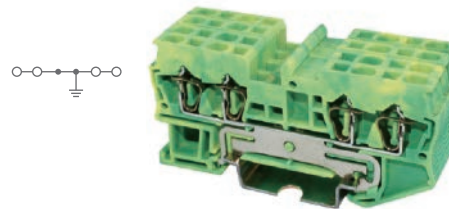

JUT3-4/2-2PE
Ground terminal block
two input two output


Parameters			
Product complies with the standards		IEC60947-7-2 GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
6.2	87.0	36.5	44.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-6	0.5-4	24-10	10
Ordering information			
Model		Retail price	
JUT3-4/2-2PE		\$ 6.60	
G-JUT3-4/2-2		\$ 0.99	

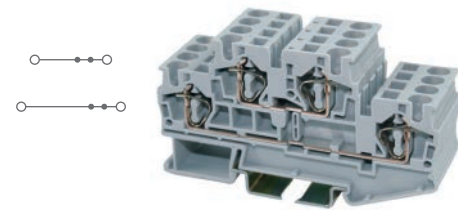

JUT3-4/2-GY
Two layers terminal block
two input two output


Parameters			
Product complies with the standards		IEC60947-7-1 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
6.2	83.5	49.0	56.5
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	32	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-6	0.5-4	24-10	10
Ordering information			
Model		Retail price	
JUT3-4/2-GY		\$ 4.04	
JUT3-4/2-BE		\$ 4.04	
G-JUT3-4/2		\$ 1.18	

Spring-cage terminal block JUT3 series

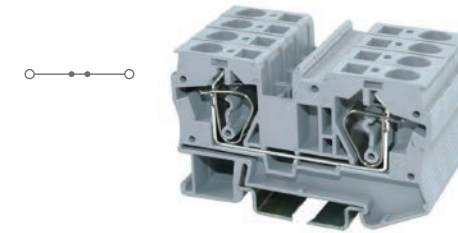


JUT3-6-GY
Feed-through terminal block

Parameters			
Product complies with the standards		IEC60947-7-1 UL 1059 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	65.5	43.5	51.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	57	600	40
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-6	24-8	12
Ordering information			
Model		Retail price	
JUT3-6-GY		\$ 0.67	
JUT3-6-BE		\$ 0.67	
G-JUT3-6		\$ 0.67	

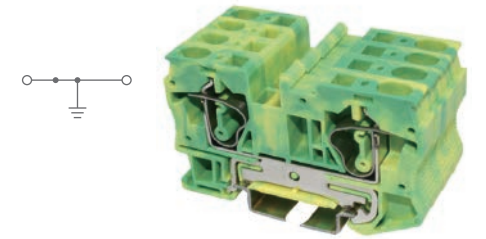


JUT3-6PE
Ground terminal block

Parameters			
Product complies with the standards		IEC60947-7-2 GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	65.5	43.5	51.0
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-6	24-8	12
Ordering information			
Model		Retail price	
JUT3-6PE		\$ 4.58	
G-JUT3-6		\$ 0.67	

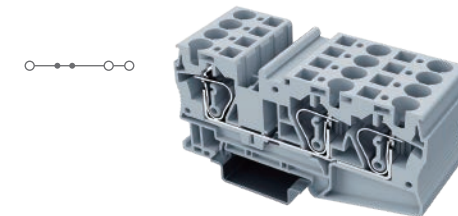

JUT3-6/1-2-GY
Feed-through terminal block
one input two output


Parameters			
Product complies with the standards		IEC60947-7-1 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	78.0	41.7	49.2
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	40	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-6	24-8	12
Ordering information			
Model		Retail price	
JUT3-6/1-2-GY		\$ 3.71	
JUT3-6/1-2-BE		\$ 3.71	
G-JUT3-6/1-2		\$ 1.13	

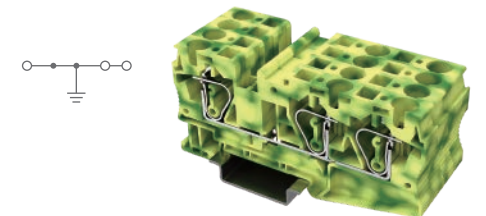

JUT3-6/1-2PE
Ground terminal block
one input two output

Parameters			
Product complies with the standards		IEC60947-7-2 GB 14048.7.2	
Size information			
Width	Height	Depth	Depth \curvearrowright
8.2	78.0	41.7	49.2
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.5-10	0.5-6	24-8	12
Ordering information			
Model		Retail price	
JUT3-6/1-2PE		\$ 6.78	
G-JUT3-6/1-2		\$ 1.13	

Spring-cage terminal block JUT3 series

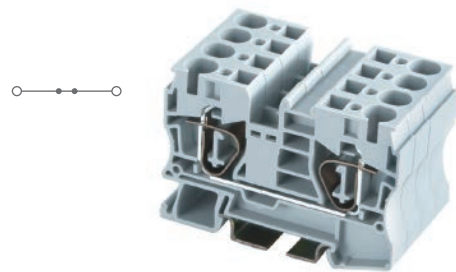

JUT3-10-GY

Feed-through terminal block

Parameters

Product complies with the standards

IEC60947-7-1 GB 14048.7.1



Size information

Width	Height	Depth	Depth ↘
10.2	71.4	50.2	57.7

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	57	--	--


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-10	0.08-10	16-6	18

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	● Grey (GY)

Model	Retail price
JUT3-10-GY	\$ 3.19
JUT3-10-BE	\$ 3.19
G-JUT3-10	\$ 0.71

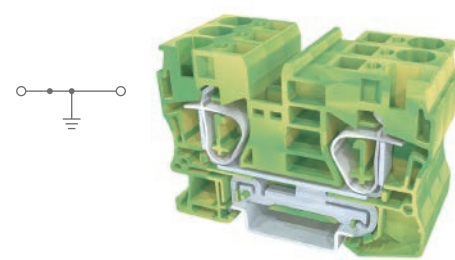

JUT3-10PE

Ground terminal block

Parameters

IEC60947-7-2 GB 14048.7.2




Width	Height	Depth	Depth ↘
10.2	71.4	50.2	57.7

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-10	0.08-10	16-6	18

Ordering information

Model	Retail price
JUT3-10PE	\$ 7.30
G-JUT3-10	\$ 0.71

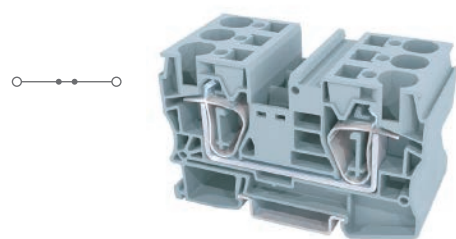

JUT3-16-GY

Feed-through terminal block

Parameters

Product complies with the standards

IEC60947-7-1 GB 14048.7.1



Size information

Width	Height	Depth	Depth ↘
12.2	80.4	51.1	62.2

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	76	--	--


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
1.5-16	1.5-16	16-4	18

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	● Grey (GY)

Model	Retail price
JUT3-16-GY	\$ 4.30
JUT3-16-BE	\$ 4.30
G-JUT3-16	\$ 0.97

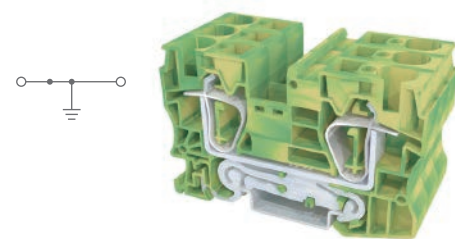

JUT3-16PE

Ground terminal block

Parameters

IEC60947-7-2 GB 14048.7.2



Width	Height	Depth	Depth ↘
12.2	80.4	51.1	62.2


IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
1.5-16	1.5-16	16-4	18

Ordering information

Model	Retail price
JUT3-16PE	\$ 8.67
G-JUT3-16	\$ 0.97

Spring-cage terminal block JUT3 series

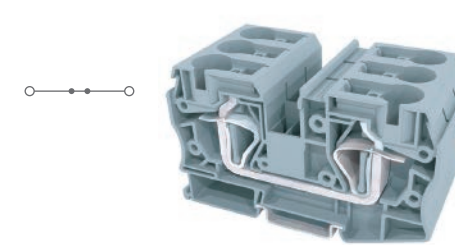

JUT3-35-GY

Feed-through terminal block

Parameters

Product complies with the standards

IEC60947-7-1 GB 14048.7.1



Size information

Width	Height	Depth	Depth ↘
16.2	99.8	59.1	66.6

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
1000	125	--	--


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
2.5-35	2.5-35	14-2	25

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	● Grey (GY)

Model	Retail price
JUT3-35-GY	\$ 22.81
JUT3-35-BE	\$ 22.81
G-JUT3-35	\$ 1.10

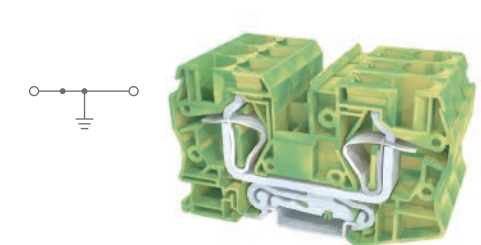

JUT3-35PE

Ground terminal block

Parameters

IEC60947-7-2 GB 14048.7.2




Width	Height	Depth	Depth ↘
16.2	99.8	59.1	66.6

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
--	--	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
2.5-35	2.5-35	14-2	25

Ordering information

Model	Retail price
JUT3-35PE	\$ 57.35
G-JUT3-35	\$ 1.10

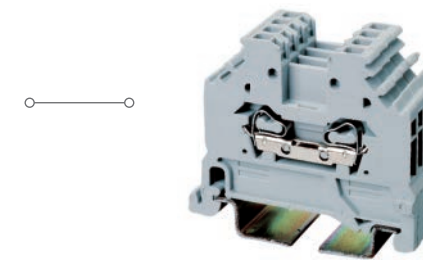

JUT3-1.5W-GY

Feed-through terminal block-side entry

Parameters

Product complies with the standards

IEC60947-7-1 GB 14048.7.1



Size information

Width	Height	Depth	Depth ↘
4.0	43.0	38.3	45.8

Electrical parameters

IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	17.5	--	--


Rigid wire / Flexible wire / AWG / Stripping length (mm)

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-1.5	0.08-1.5	--	8-9

Ordering information

Description	Color
Terminal block	<ul style="list-style-type: none"> ● Grey (GY) ● Blue (BE) ● Yellow + Green (PE)
End plate	● Grey (GY)

Model	Retail price
JUT3-1.5W-GY	\$ 0.88
JUT3-1.5W-BE	\$ 0.88

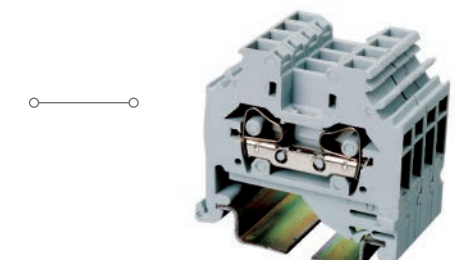

JUT3-2.5W-GY

Feed-through terminal block-side entry

Parameters

IEC60947-7-1 GB 14048.7.1



Width	Height	Depth	Depth ↘
5.0	42.8	38.2	45.7


IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
800	24	--	--

Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-2.5	0.08-2.5	24-12	10

Ordering information

Model	Retail price
JUT3-2.5W-GY	\$ 1.12
JUT3-2.5W-BE	\$ 1.12

Spring-cage terminal block JUT3 series



JUT3-4W-GY

Feed-through terminal block-side entry

Parameters

IEC60947-7-1 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright	
6.0	42.2	40.4	47.9	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
800	32	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-4	0.08-4	24-10	10	

Ordering information

Model	Retail price
JUT3-4W-GY	\$ 1.51
JUT3-4W-BE	\$ 1.51

Product complies with the standards


Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description Color

- Terminal block
 - Grey (GY)
 - Blue (BE)
 - Yellow + Green (PE)
- End plate
 - Grey (GY)



JUT3-6W-GY

Feed-through terminal block-side entry

Parameters


IEC60947-7-1 GB 14048.7.1




Width	Height	Depth	Depth \curvearrowright	
8.0	46.2	44.5	52.0	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
800	41	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-6	0.08-6	24-8	12	

Ordering information


Model	Retail price
JUT3-6W-GY	\$ 2.36
JUT3-6W-BE	\$ 2.36

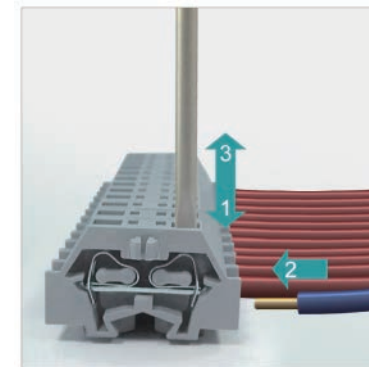


Three Steps for Wiring Method.

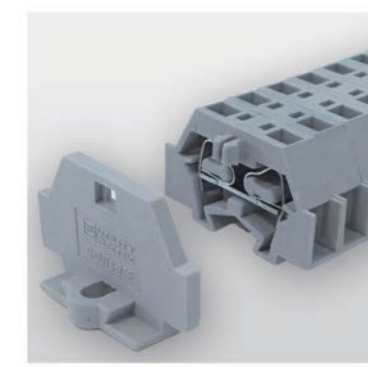


End Plate Installation.

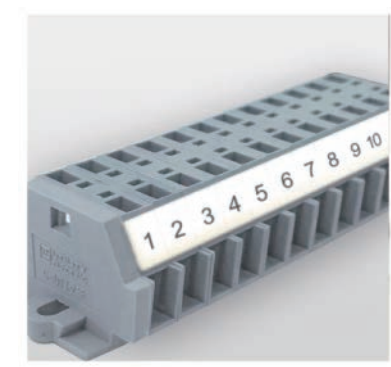


Use adhesive label strips for marking.

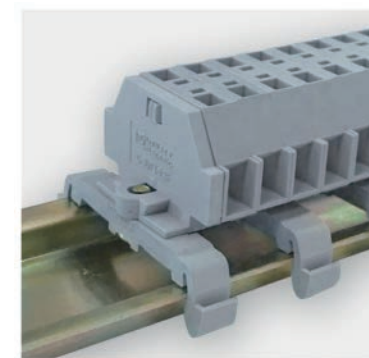


Use a jumper to make cross connections.

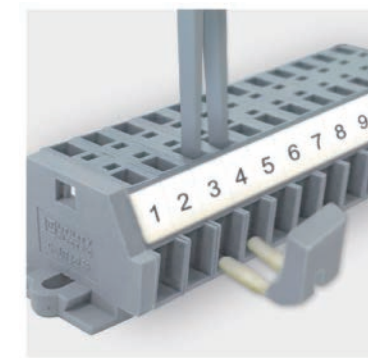

Side insert installation.

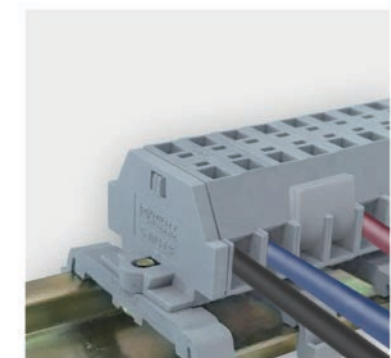

Application of test plugs and its adapter.



JUT3-10W-GY

Feed-through terminal block-side entry

Parameters

IEC60947-7-1 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright	
10.0	52.0	49.1	56.6	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
800	57	--	--	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.08-10	0.08-10	16-6	10	

Ordering information

Model	Retail price
JUT3-10W-GY	\$ 4.81
JUT3-10W-BE	\$ 4.81

Product complies with the standards


Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description Color

- Terminal block
 - Grey (GY)
 - Blue (BE)
 - Yellow + Green (PE)
- End plate
 - Grey (GY)



JUT3-1.5F-GY

Feed-through terminal block-side entry

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1



Width	Height	Depth	Depth \curvearrowright	
5.0	25.0	17.2	--	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
400	18	600	10	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.8-1.5	0.8-1.5	18-16	8-9	

Ordering information

Model	Retail price
JUT3-1.5F-GY	\$ 0.70
JUT3-1.5F-BE	\$ 0.70
G-JUT3-1.5F	\$ 0.32
KJQ-1.5F	

Product complies with the standards


Size information

Electrical parameters

Rigid wire / Flexible wire / AWG / Stripping length (mm)

Description Color

- Terminal block
 - Grey (GY)
 - Blue (BE)
- End plate
 - Grey (GY)
- Jumper



JUT3-2.5F-GY

Feed-through terminal block-side entry

Parameters

IEC60947-7-1 UL 1059 GB 14048.7.1




Width	Height	Depth	Depth \curvearrowright	
6.0	28.4	18.2	--	
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)	
500	24	600	20	
Rigid wire / Flexible wire / AWG / Stripping length (mm)	Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.8-2.5	0.8-2.5	18-12	10	

Ordering information

Model	Retail price
JUT3-2.5F-GY	\$ 0.80
JUT3-2.5F-BE	\$ 0.80
G-JUT3-2.5F	\$ 0.38
KJQ-1.5F	


Spring-cage terminal block JUT3 series

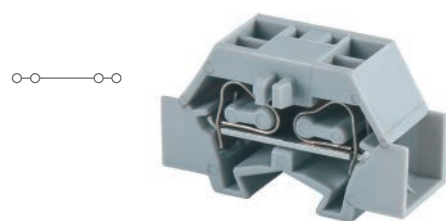

JUT3-2.5F/2-GY
Feed-through terminal block-side entry
two input two output

Parameters			
Product complies with the standards		IEC60947-7-1 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
10.0	28.4	18.2	--
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
500	24	--	--
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.8-2.5	0.8-2.5	24-12	10

Ordering information		
Model	Retail price	
JUT3-2.5F/2-GY	\$ 1.76	
JUT3-2.5F/2-BE	\$ 1.76	
G-JUT3-2.5F	\$ 0.38	
KJQ-1.5F		

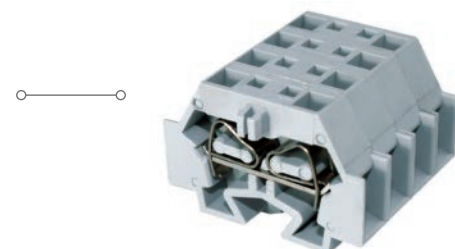

JUT3-4F-GY
Feed-through terminal block-side entry

Parameters			
Product complies with the standards		IEC60947-7-1 UL 1059 GB 14048.7.1	
Size information			
Width	Height	Depth	Depth \curvearrowright
7.0	33.5	23.2	--
Electrical parameters			
IEC voltage (V)	IEC current (A)	UL voltage (V)	UL current (A)
690	30	600	30
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Rigid wire (mm ²)	Flexible wire (mm ²)	AWG	Stripping length
0.8-4	0.8-4	24-10	10

Ordering information		
Model	Retail price	
JUT3-4F-GY	\$ 0.96	
JUT3-4F-BE	\$ 0.96	
G-JUT3-4F	\$ 0.43	
KJQ-1.5F		

Product complies with the standards			
Size information			
Electrical parameters			
Rigid wire / Flexible wire / AWG / Stripping length (mm)			
Description	Color		
Terminal block	<ul style="list-style-type: none"> Grey (GY) Blue (BE) 		
End plate	<ul style="list-style-type: none"> Grey (GY) 		
Jumper			

JUT3 SERIES

Product accessory

End plate



G-JUT3-1.5/2.5



G-JUT3-2.5/2



G-JUT3-2.5/1-2



G-JUT3-2.5/2-2



G-JUT3-4



G-JUT3-4/2-2

Panel Mark



ZBFM4



ZBFM5



ZBFM6


Mark strip



ZB4




ZB5

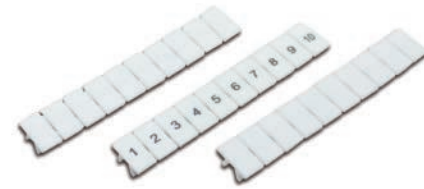

ZB6



ZB8

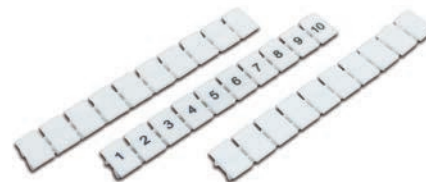

ZB10

End clamp


Compatible with all models



E/3

Plug-in bridge connection

Compatible with all models

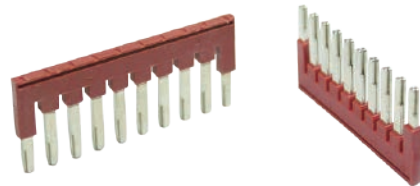

JFBS

Mark clip

Compatible with all models



KLM-A

JUT3 SERIES


Product accessory

Product model	End plate	Plug-in bridge connection	Panel mark	Mark strip
JUT3-1.5-GY JUT3-1.5PE	G-JUT3-1.5/2.5(GY) -- G-JUT3-1.5/2.5(BE) -- G-JUT3-1.5/2.5(OR) -- G-JUT3-1.5/2.5(YL) --	JFBS2-1.5 -- JFBS3-1.5 -- JFBS10-1.5 --	ZBFM4 --	ZB4 --
JUT3-1.5/1-2-GY JUT3-1.5/1-2PE	G-JUT3-2.5/1-2 --	JFBS2-1.5 -- JFBS3-1.5 -- JFBS10-1.5 --	ZBFM4 --	ZB4 --
JUT3-1.5/2-2-GY JUT3-1.5/2-2PE	G-JUT3-2.5/2-2(GY) -- G-JUT3-2.5/2-2(BE) --	JFBS2-1.5 -- JFBS3-1.5 -- JFBS10-1.5 --	ZBFM4 --	ZB4 --
JUT3-1.5/2-GY	G-JUT3-2.5/2 --	JFBS2-1.5 -- JFBS3-1.5 -- JFBS10-1.5 --	ZBFM4 --	ZB4 --
JUT3-2.5-GY JUT3-2.5PE	G-JUT3-1.5/2.5(GY) -- G-JUT3-1.5/2.5(BE) -- G-JUT3-1.5/2.5(OR) -- G-JUT3-1.5/2.5(YL) --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
JUT3-2.5/1-2-GY JUT3-2.5/1-2PE	G-JUT3-2.5/1-2 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
JUT3-2.5/2-2-GY JUT3-2.5/2-2PE	G-JUT3-2.5/2-2(GY) -- G-JUT3-2.5/2-2(BE) --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
JUT3-2.5/2-GY	G-JUT3-2.5/2 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	--
JUT3-2.5/2-2X-GY	--	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	ZB5 --
JUT3-2.5/2L-GY	G-JUT3-2.5/2 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	--
JUT3-2.5/3-GY	G-JUT3-2.5/3 --	JFBS2-2.5 -- JFBS3-2.5 -- JFBS10-2.5 --	ZBFM5 --	--
JUT3-4-GY JUT3-4PE	G-JUT3-4(GY) -- G-JUT3-4(BE) --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	ZB6 --

Product model	End plate	Plug-in bridge connection	Panel mark	Mark strip
JUT3-4/2-2-GY JUT3-4/2-2-PE	G-JUT3-4/2-2(GY) -- G-JUT3-4/2-2(BE) --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	ZB6 --
JUT3-4/2-GY	G-JUT3-4/2 --	JFBS2-4 -- JFBS3-4 -- JFBS10-4 --	ZBFM6 --	--
JUT3-6-GY JUT3-6PE	G-JUT3-6(GY) -- G-JUT3-6(BE) --	JFBS2-6 -- JFBS3-6 -- JFBS10-6 --	--	ZB8 --
JUT3-6/1-2-GY	G-JUT3-6/1-2 --	JFBS2-6 -- JFBS3-6 -- JFBS10-6 --	--	ZB8 --
JUT3-10-GY JUT3-10PE	G-JUT3-10(GY) -- G-JUT3-10(BE) --	JFBS2-10 --	--	ZB10 --
JUT3-16-GY JUT3-16PE	G-JUT3-16(GY) -- G-JUT3-16(BE) --	JFBS2-16 --	--	ZB12 --
JUT3-35-GY JUT3-35PE	G-JUT3-35(GY) -- G-JUT3-35(BE) --	JFBS2-35 --	--	ZB16 --

GUIDE RAIL


Product accessory

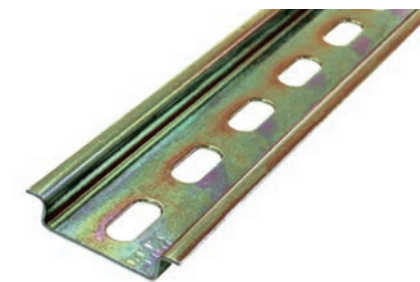

NS35/7.5 NS35/15



NS35/7.5 NS35/15

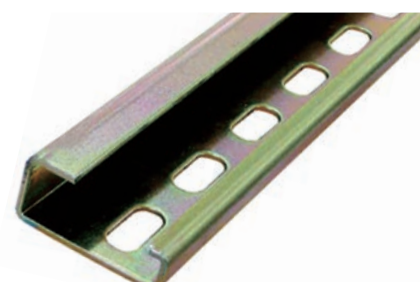

NS32/15



NS32/15



NS15/5.5



JUTDR2 JUTDR3